
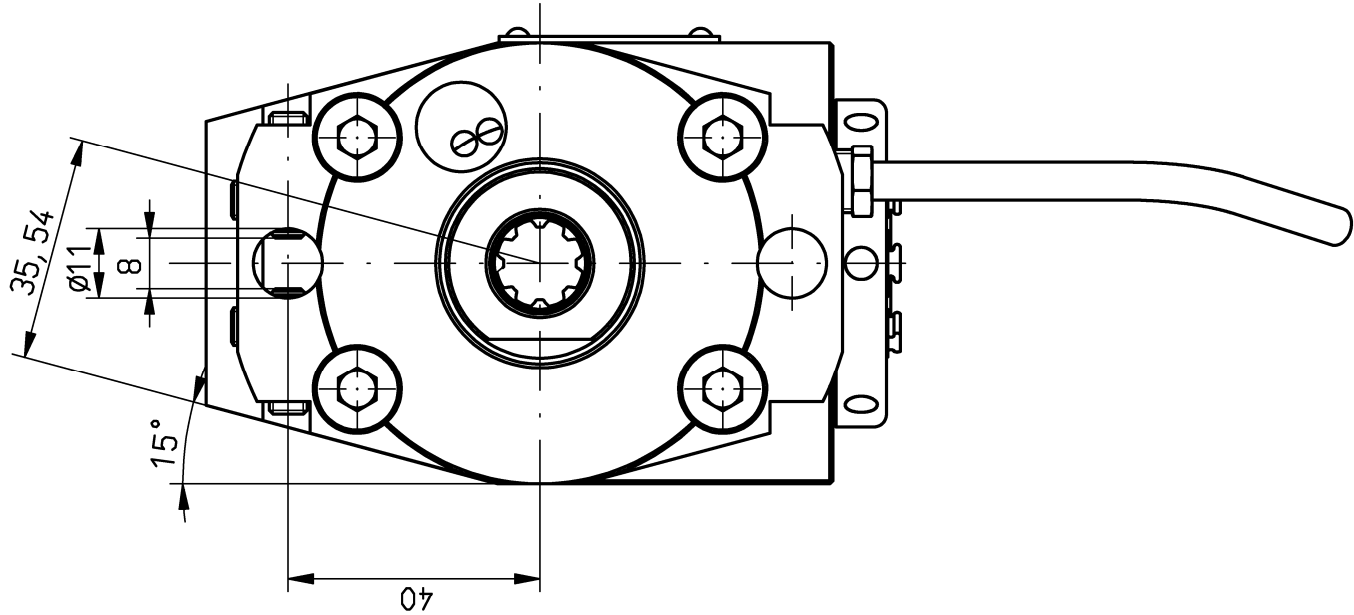


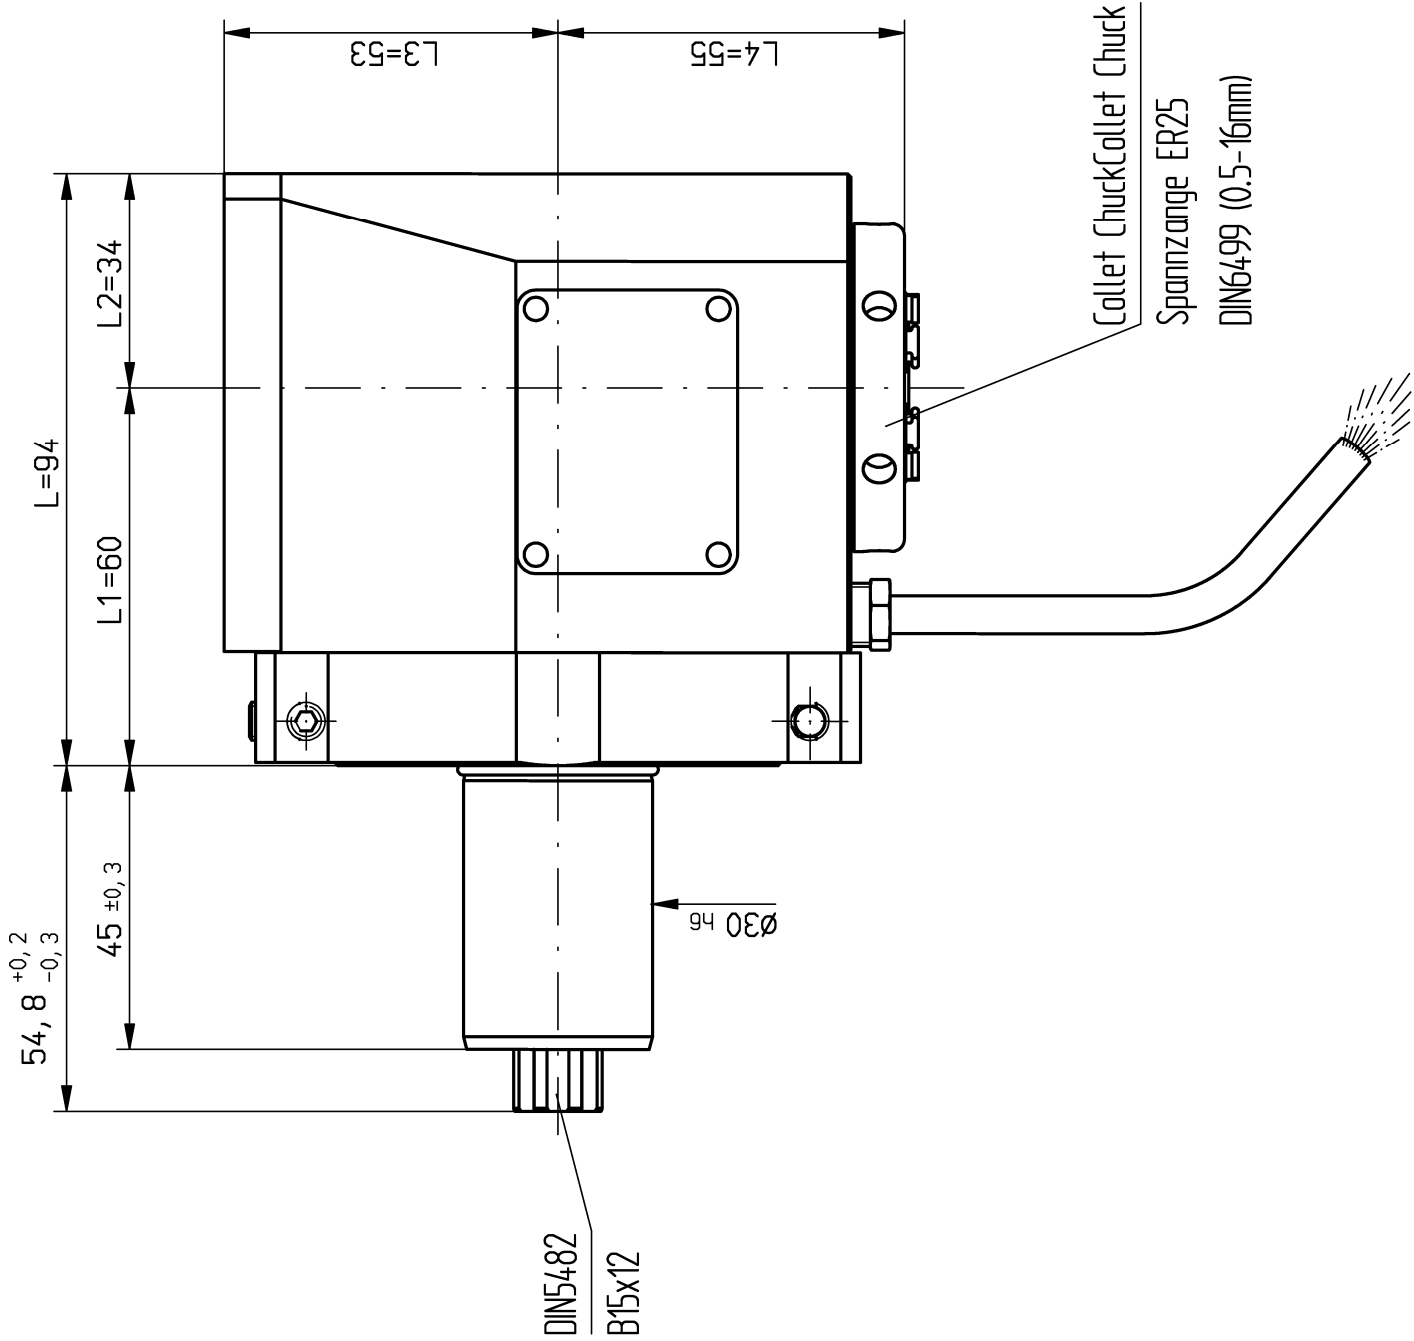


n1(max) = 6500 U/min
n2(max) = 6500 U/min
M (max) = 25 Nm
i(n1/n2) = 1 : 1

Drehrichtungsumkehr
direction of rotation reversal

Kühlmittelzufuhr e.K. über Spritzrohr
external coolant supply through pipes

Gewicht ca. 4kg
weight around 4kg

Kopf 180° gedreht montierbar
head 180° adjusted mountable

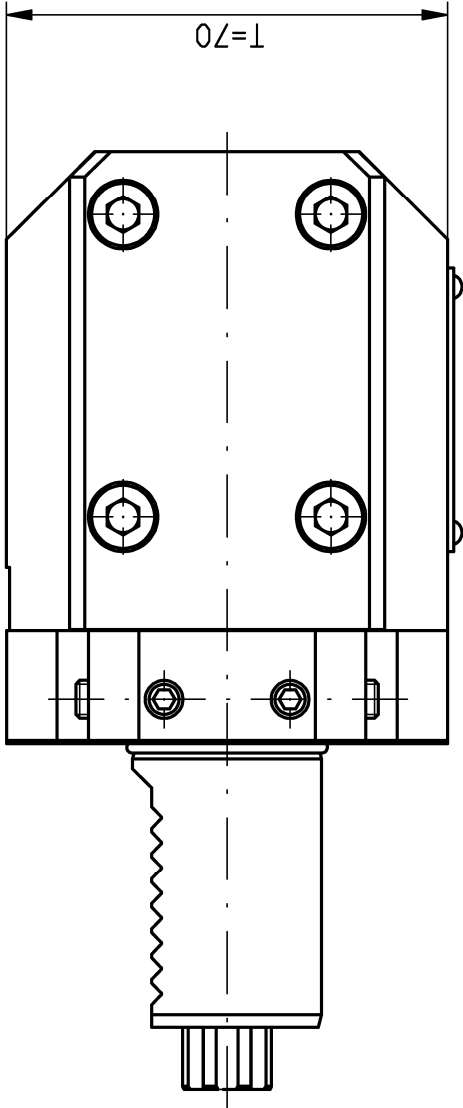

Only for information !
When one change, the drawing does not interchange
It is strictly prohibited to copy, reproduce or develop these drawings to third persons without having our written permission. A copyright violation involves a claim for damages and is indictable if it is premeditative done.
Fa. mimatic GmbH

A124491		ID-Nr.	Ally.Tol.	Maßstab 1:1	
A05.1311.1530.404			ISO 2768-m	Werkstoff:	
manuelle Änderung			11.07.2016	Maßblatt	
			Datum		
			Bearb./k.10.1998	Name	
			Gepr. 11.07.2016	Holzheu	
			F/M/Q	Holzheu	
				dw. C.00125678.52A	
03	Standard 2016	22.06.2016	Schm	Zeichnungs-Nr.:	
02	Gehäuse Maß 3x>32	31.03.2011	Holz	W20813	
01	Winkeländerung da	24.06.2005	Holz		
Zust.	Änderung	Datum	Name	Urspr. 00004104	
				Ers. f.:	Bl.
				Ers. d.:	Plaisirer

mimatic®
m i m a t i c

mimatic 87488 Betzigou – Westendstraße 3
GmbH Tel.: 0831/57444-0 Fax.: -90

AGW-SA-C-30-5482-ER25-E Blatt
L1=60 i=1:1 S=45 Rechts