
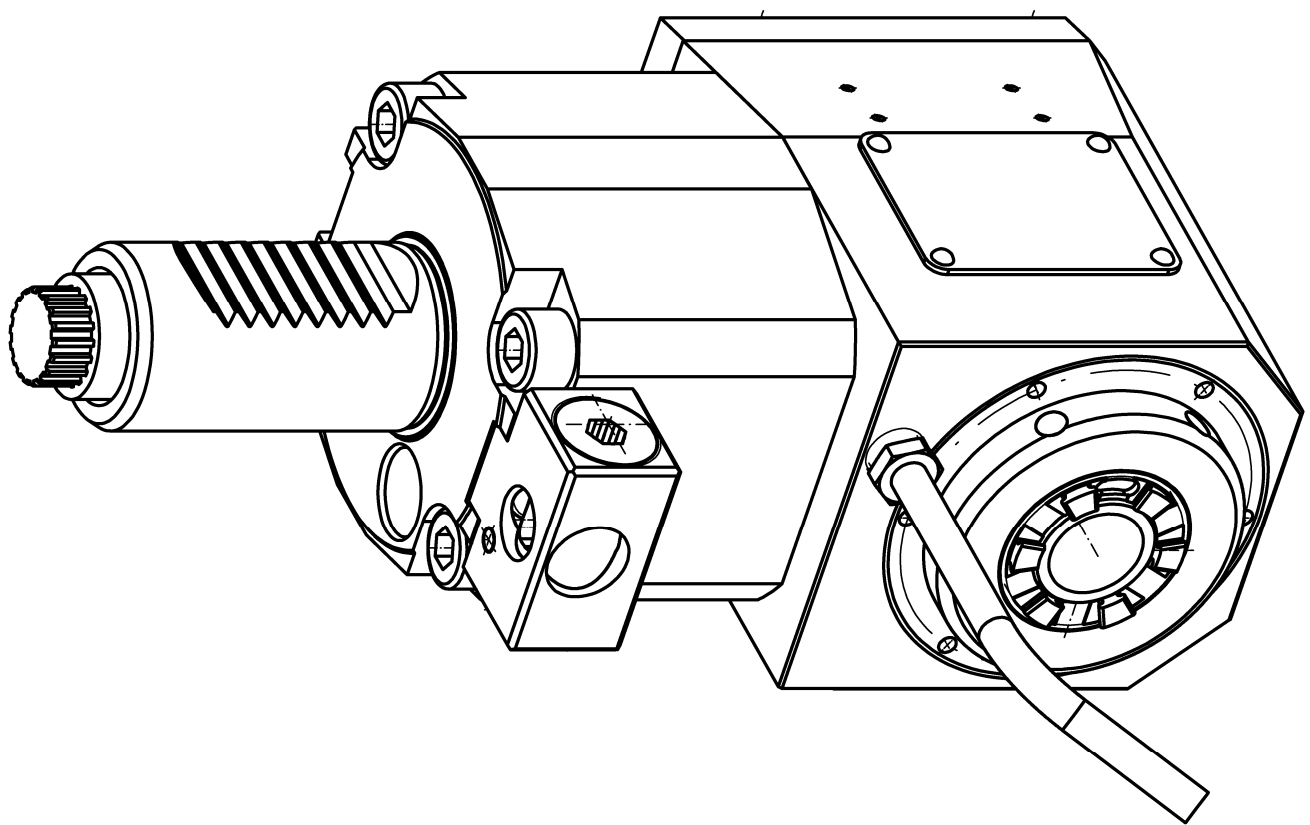
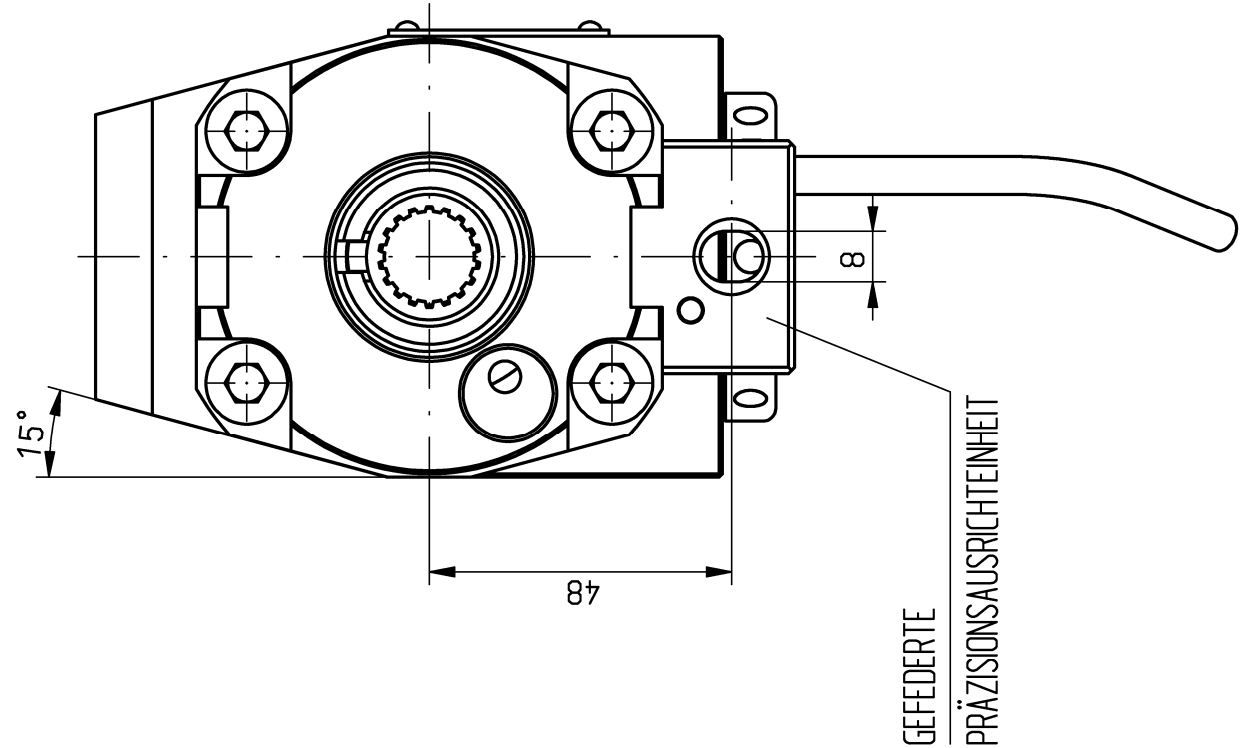


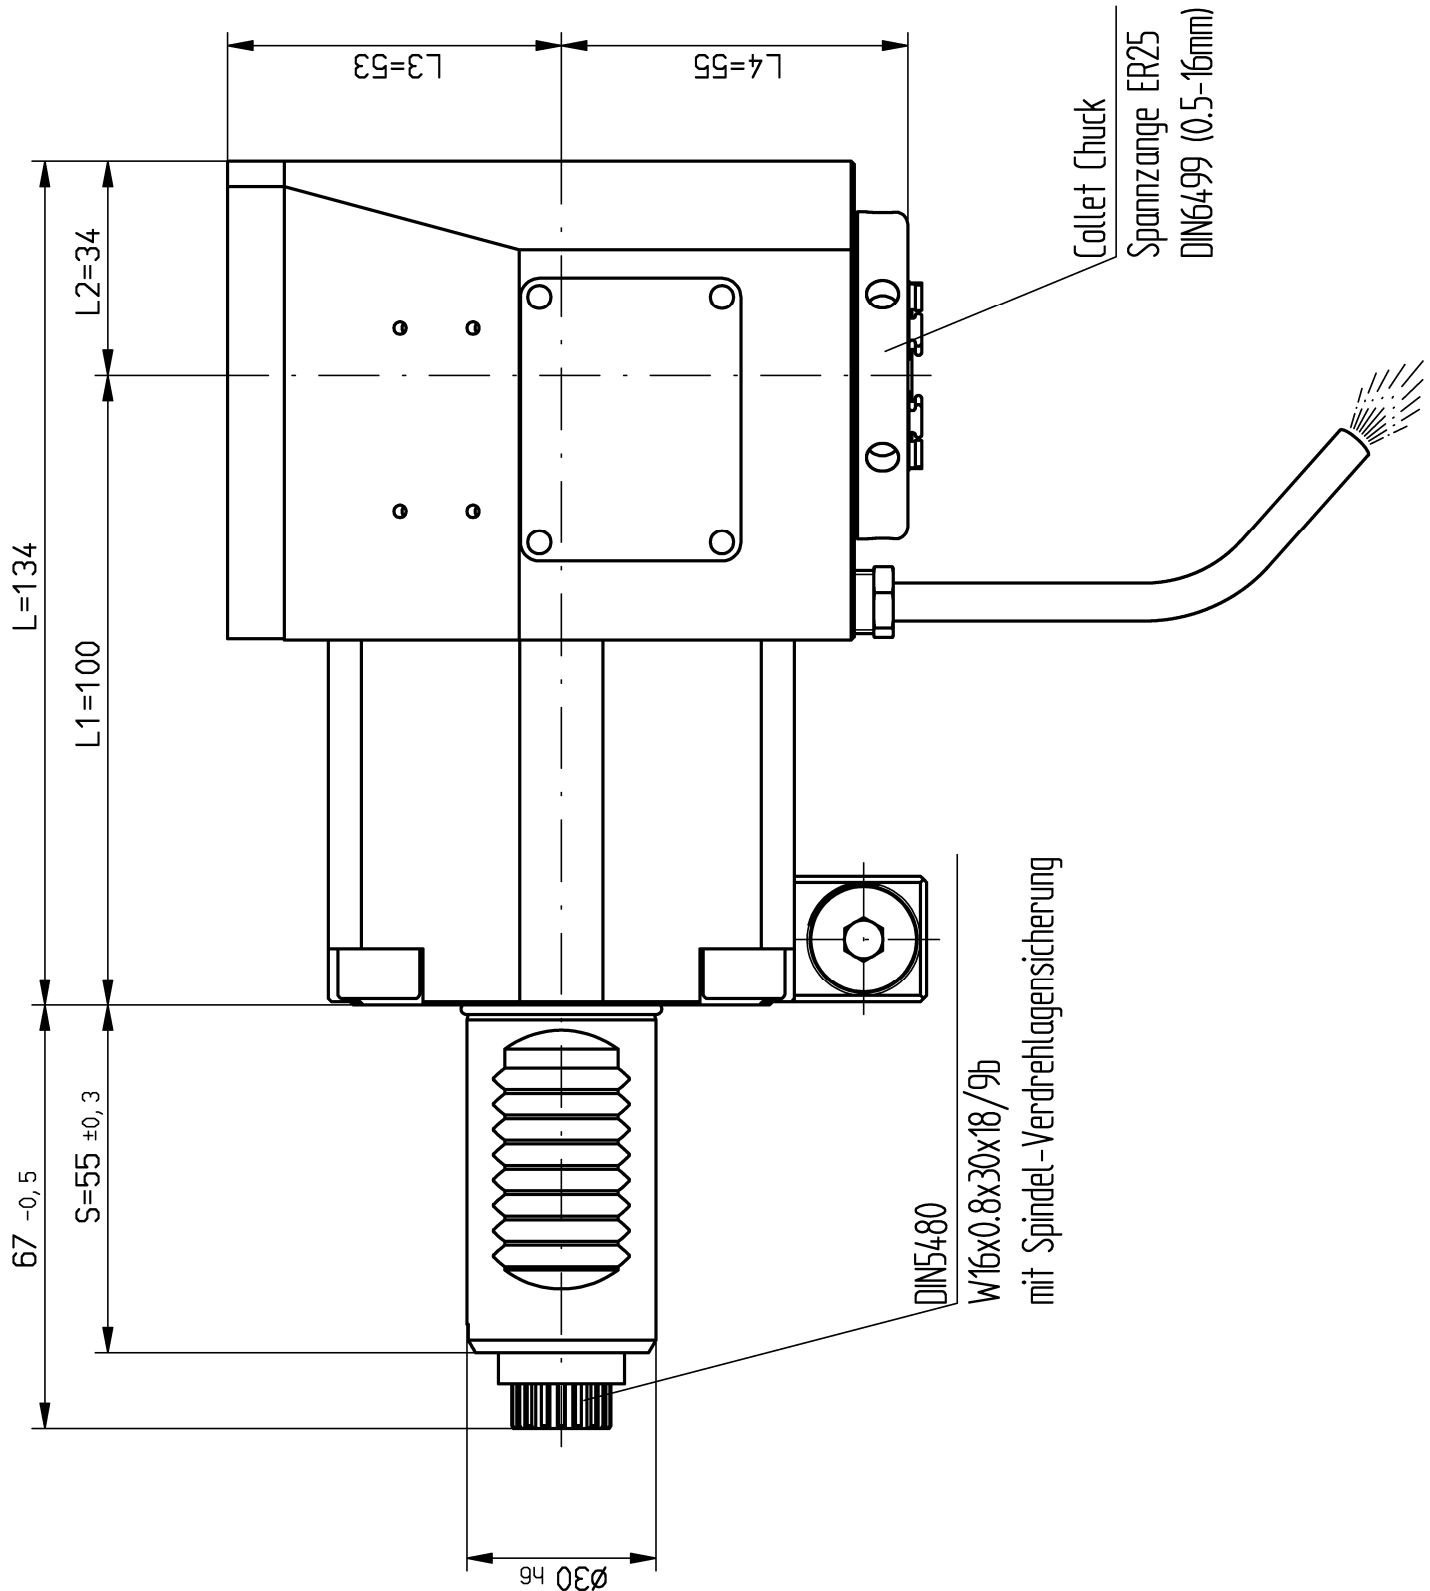


n1(max) = 10000 U/min
n2(max) = 10000 U/min
M (max) = 25Nm
i(n1/n2) = 1 : 1

Drehrichtungsumkehr
direction of rotation reversal

Kühlmittelzufuhr e.K. über Spritzrohr
external coolant supply through pipes

Gewicht ca. 5,5kg
weight around 5,5kg

Kopf 180° gedreht montierbar
head 180° adjusted mountable

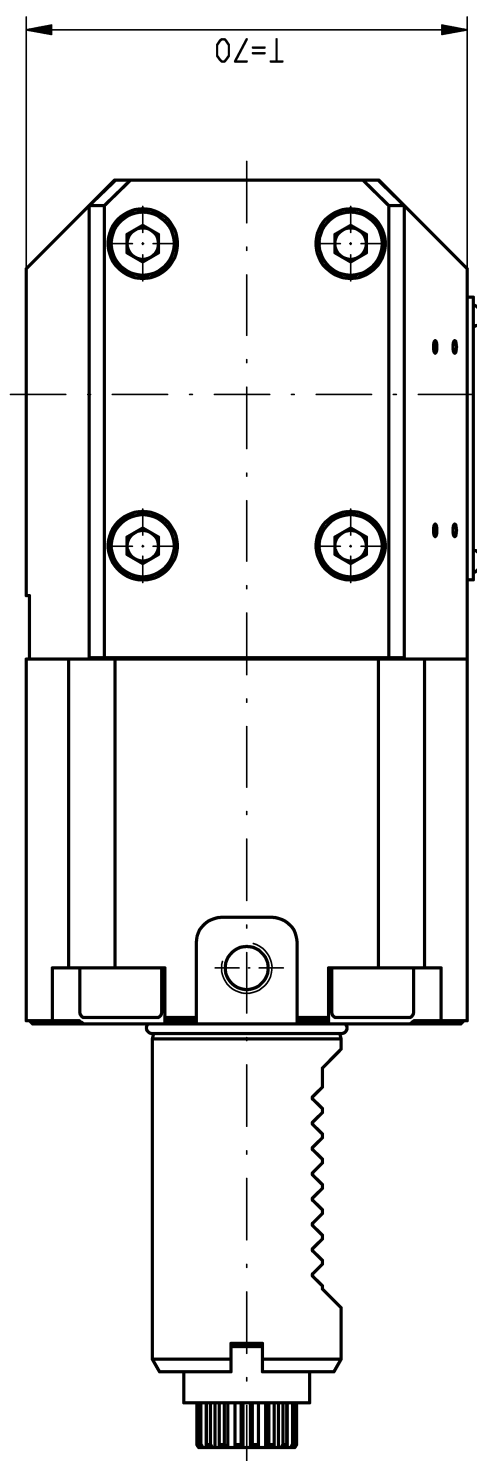

Only for information !
When one changes, the drawing does not interchange

It is strictly prohibited to copy, reproduce or develop these drawings to third persons without having our written permission. A copyright violation involves a claim for damages and is indictable if it is premeditative done.
Fa. mimatic GmbH

A103507		ID-Nr.	Alig.Tol.	ZM-BL	Maßstab	1:1
A10000115			ISO 2768-m		Werkstoff:	
manuelle Änderung			11.05.2021		Maßblatt	
				Datum	Name	
			Bearb.	15.05.2000	Fl	
			Gepr.	07.05.2021	Krupp	
			F/M/Q			
04	Imax0000	07.05.2021	Krupp	ow. C. 00164631. SZA		
03	Standard 2016	30.06.2016	Schma	Zeichnungs-Nr.:		
02	auf Baureit wie 1377	18.12.2012	Hitzh			
01	Bearbeitung gepl. und	20.02.2009	Hic			
Zust.	Änderung	Datum	Name	Urspr.	00001947	Ers. f.:
					Ers. d.:	plattserver

Tool Systems

mimatic®

mimatic 87488 Betziguu – Westendstraße 3
GmbH Tel.: 0831/57444-0 Fax.: -90
AGW-SA-C-30-5480-ER25-E Blatt
L1=100 i=1:1 S=55 Links BL