
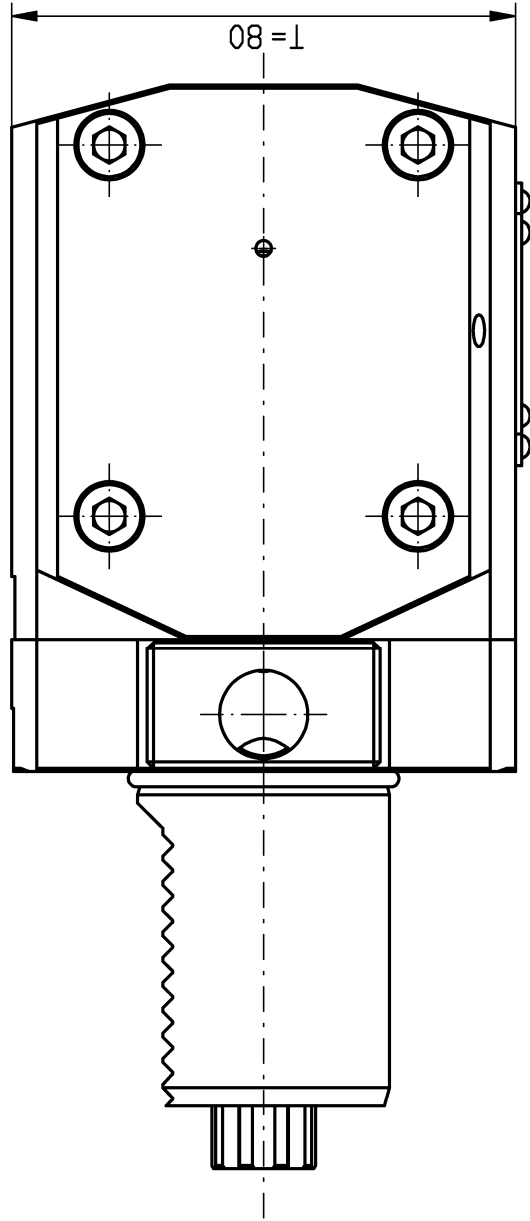


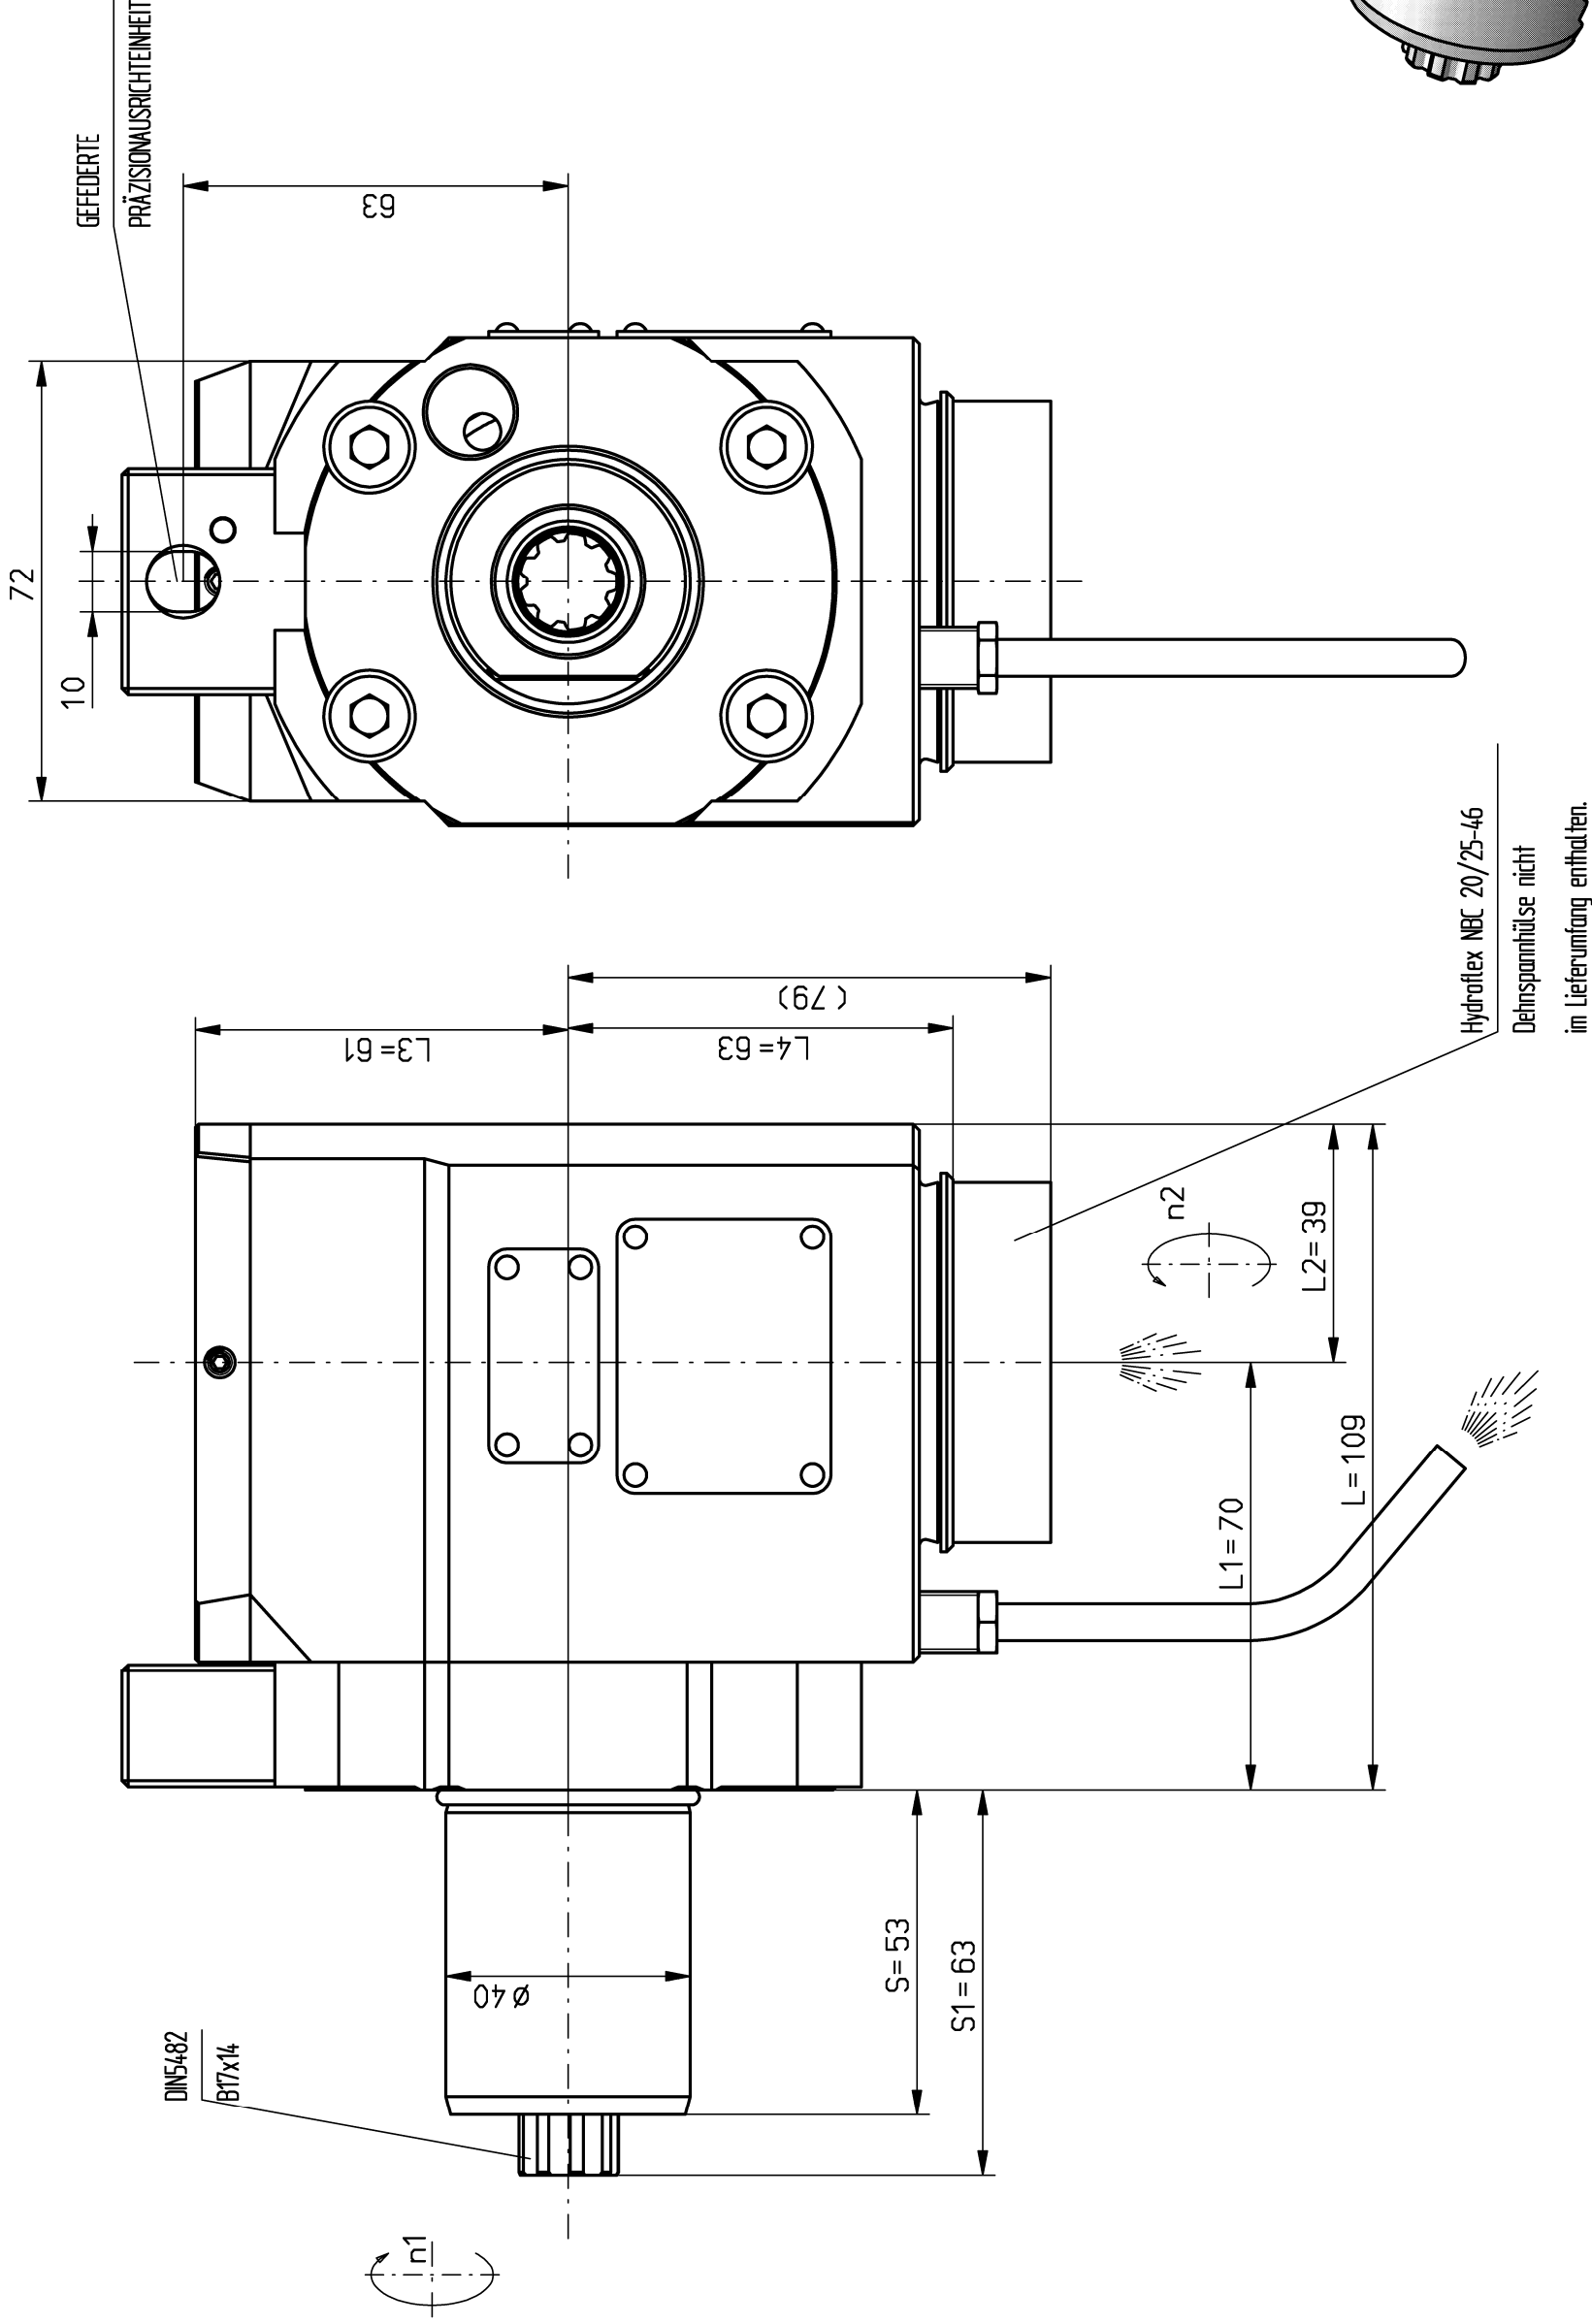


Trockenlauf konstant möglich
continuous dry run possible

$n1(max) = 6500 \text{ U/min}$
 $n2(max) = 6500 \text{ U/min}$
 $M(max) = 50 \text{ Nm}$
 $i(n1/n2) = 1 : 1$
 $p(max) = 70 \text{ bar}$

Drehrichtungsumkehr
direction of rotation reversal

Kühlmittelzufuhr i.K. durch die Spindel
und e.K. über Spritzrohr
internal coolant supply through the spindle
and external coolant supply through pipes

Gewicht ca. 7kg
weight around 7kg

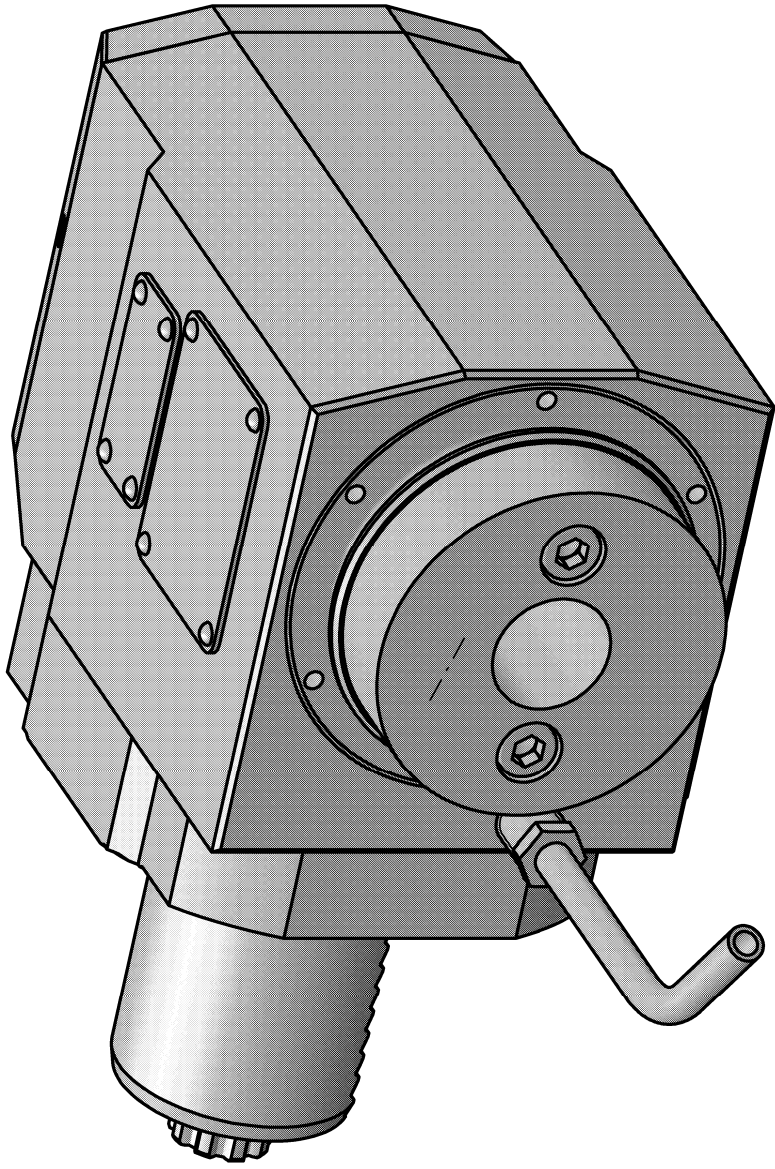

A124801		ID-Nr.	Alig. Tol.	ZM-B.	Maßstab	1:1	40107546
A05.1611.1740.20			ISO 2768-m		Werkstoff:		
		manuelle Änderung	11.10.2018		Maßblatt		
			Datum	Name	mimatic® Tool Systems mimatic 87488 Betziguu – Westendstraße 3 GmbH Tel.: 0831/57444-0 Fax.: -90		
			Bearb. 14.10.2004	Kropp			
			Gepr. 11.10.2018	Sinn			
			F/M/Q				
				ow. C. 00147474, SZA			
03		aktualisiert	10.10.2018	Sinn	Zeichnungs-Nr.:		
02		Standard 2015	19.08.2015	Sinn	00018083		
01		auf Spl 6500 1/min	05.09.2006	Hc	AGW-SA-C-40-5482-HF20-I		
Zust.		Änderung	Datum	Name	1:1 L1=70 S1=63 DU		
					Ers. f.:		
					Ers. d.: plotserver		