
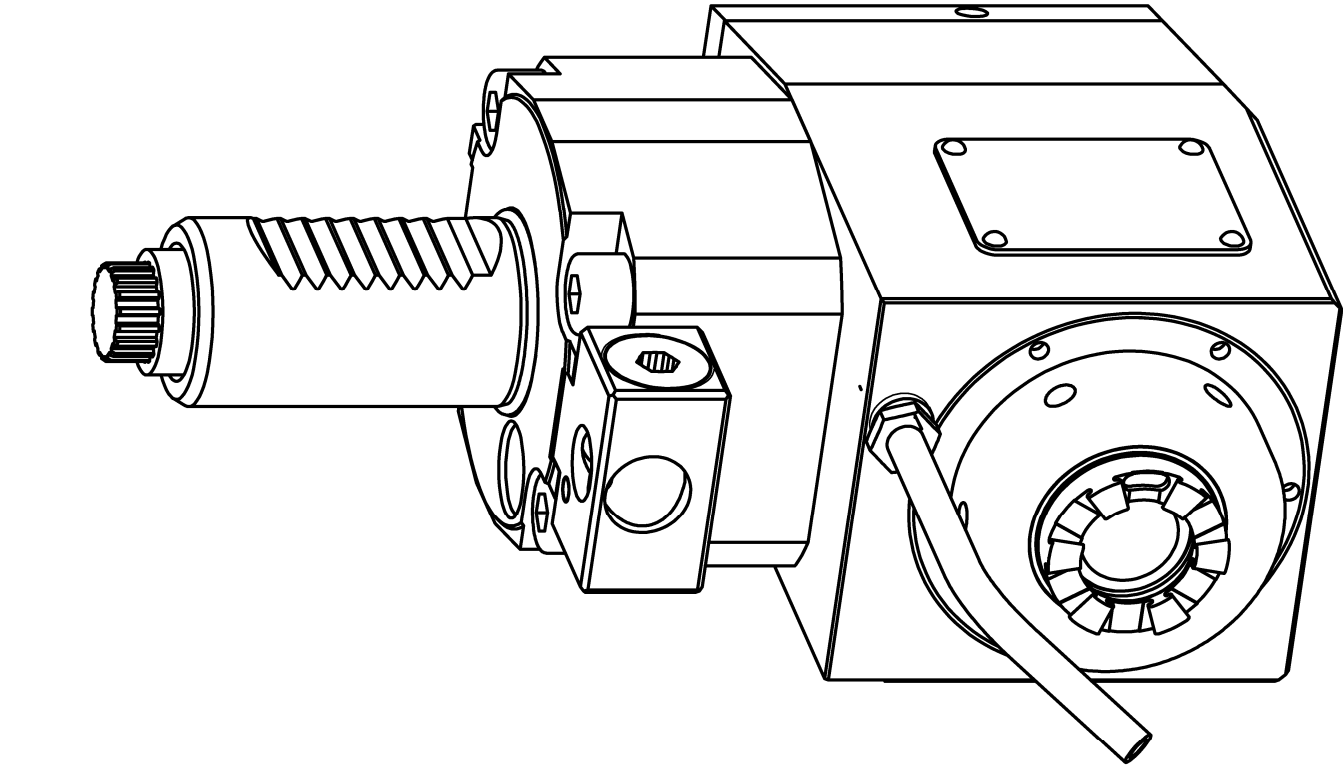


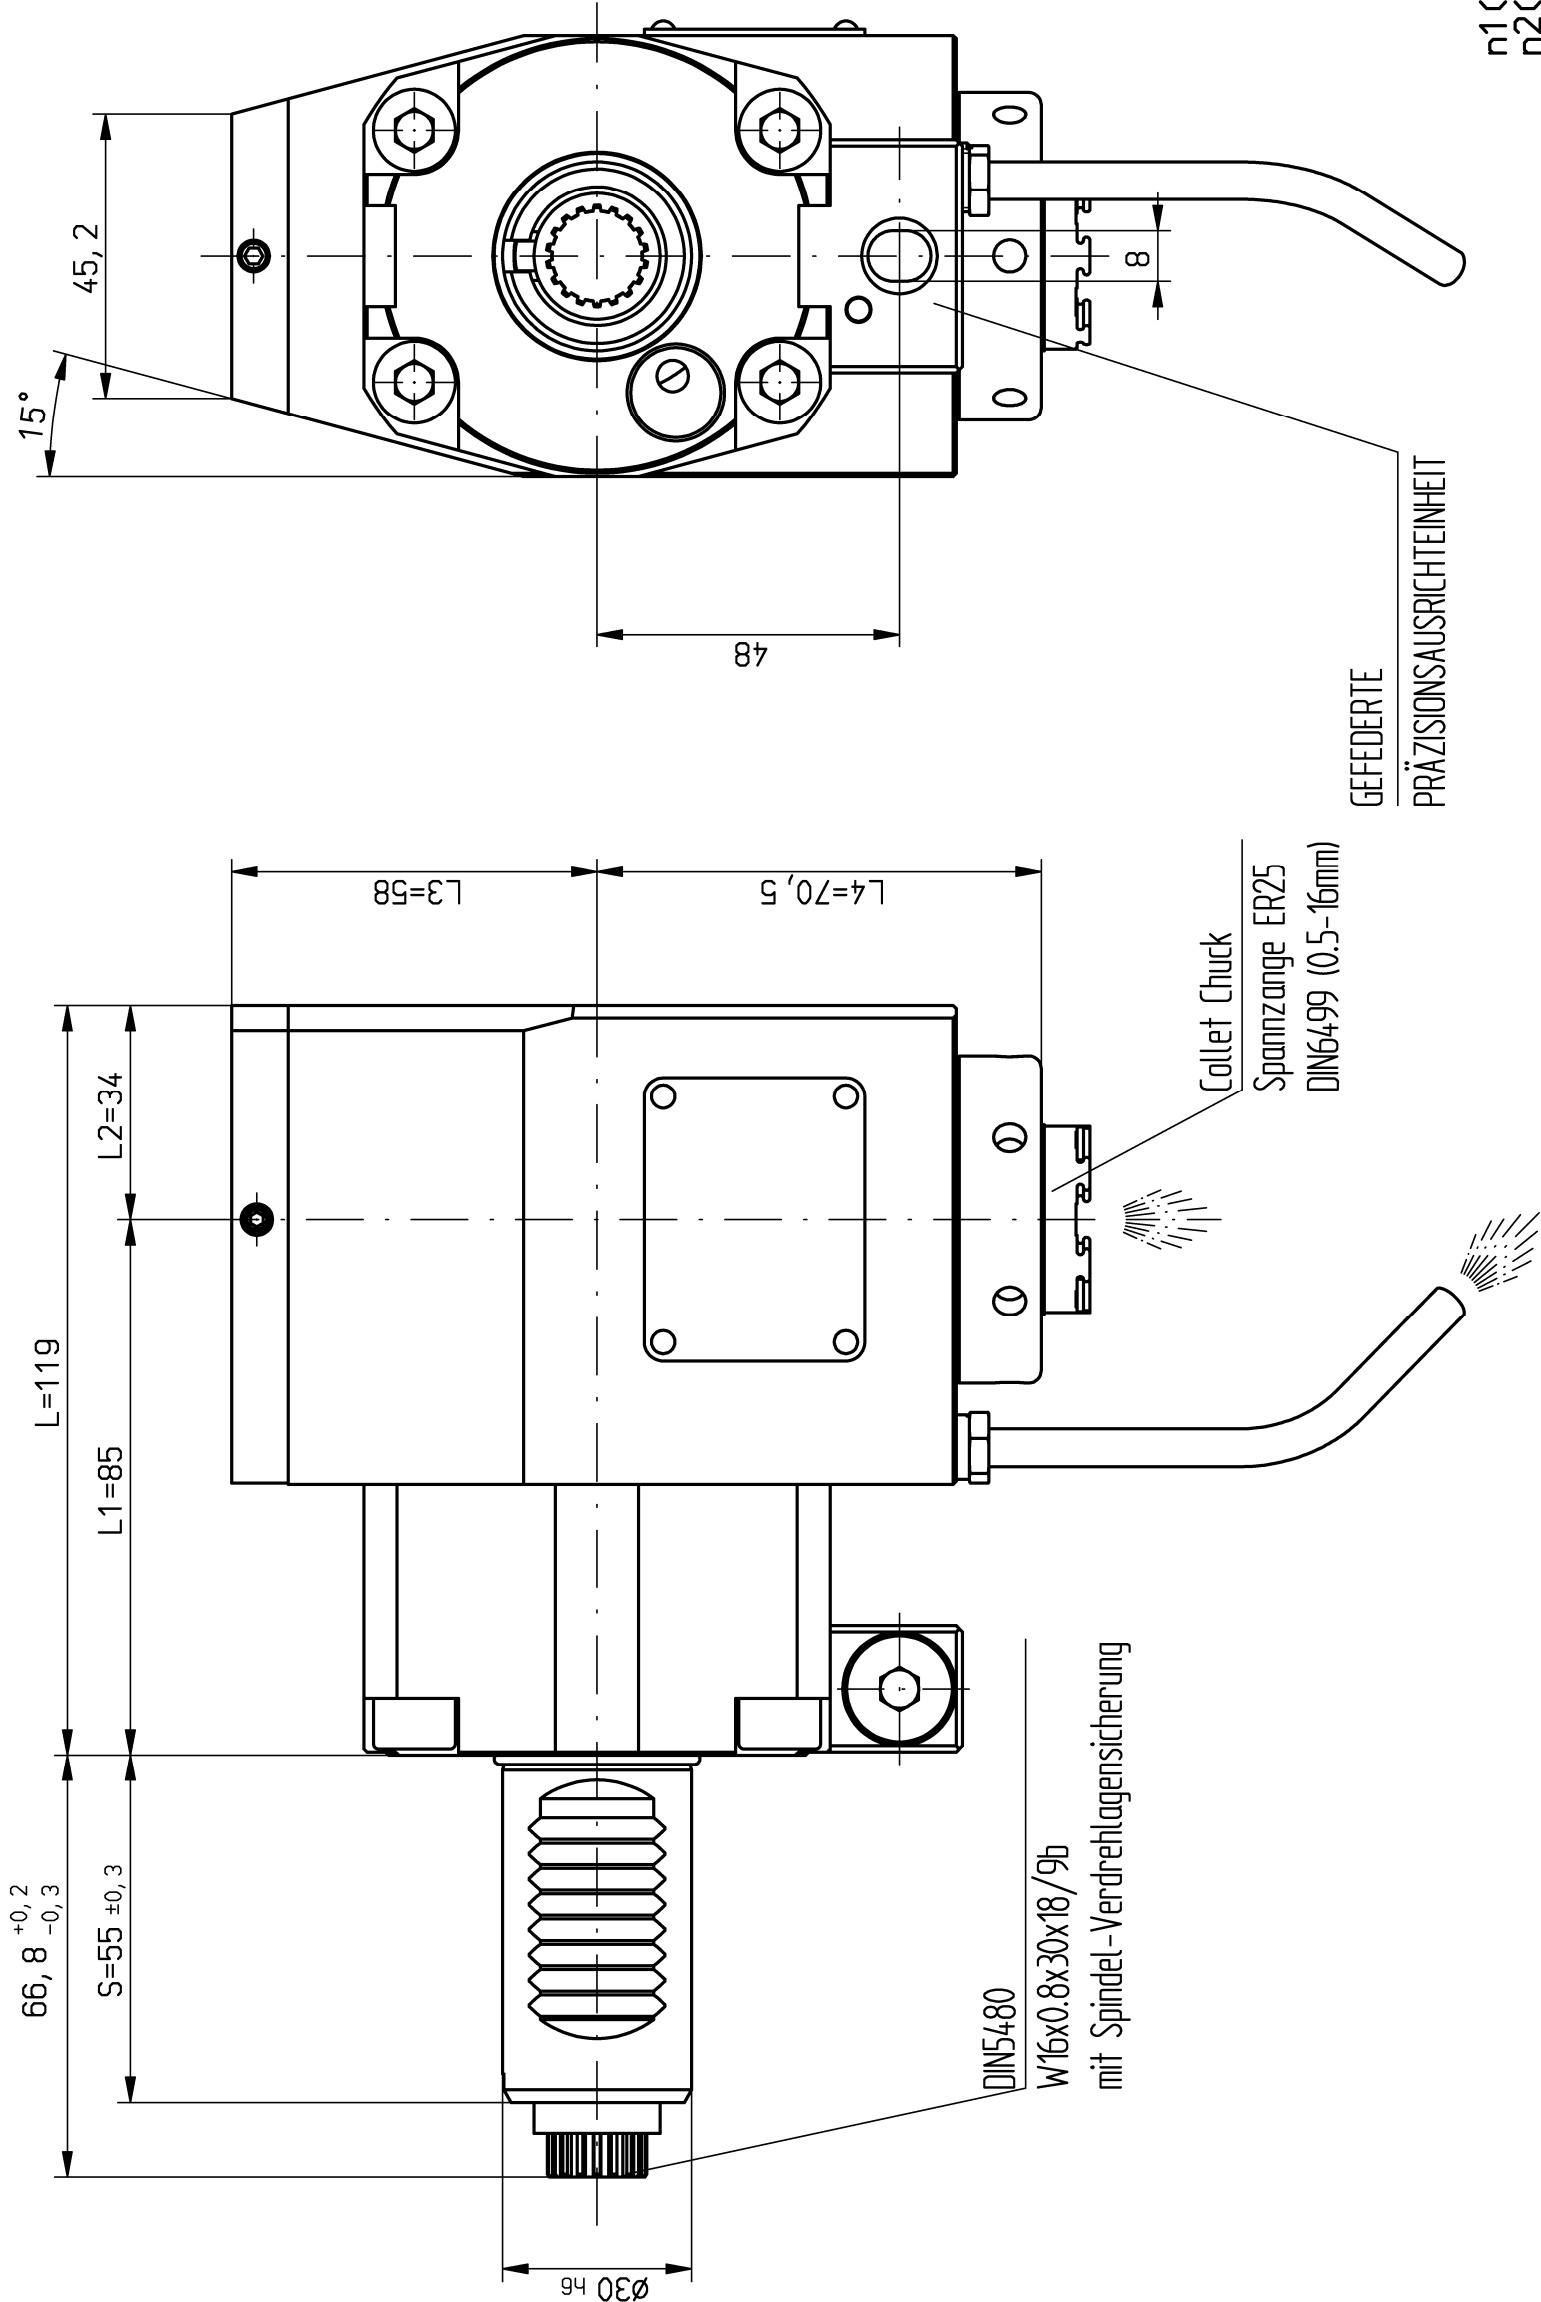


n1(max) = 6500 U/min
n2(max) = 13000 U/min
M (max) = 20 Nm
i(n1/n2) = 1 : 2
p(max) = 70bar

Drehrichtungsumkehr
direction of rotation reversal

Kühlmittelzufuhr i.K. durch die Spindel
und e.K. über Spritzrohr
internal coolant supply through the spindle
and external coolant supply through pipes

Gewicht ca. 5,5kg
weight around 5,5kg

Kopf 180° gedreht montierbar
head 180° adjusted mountable

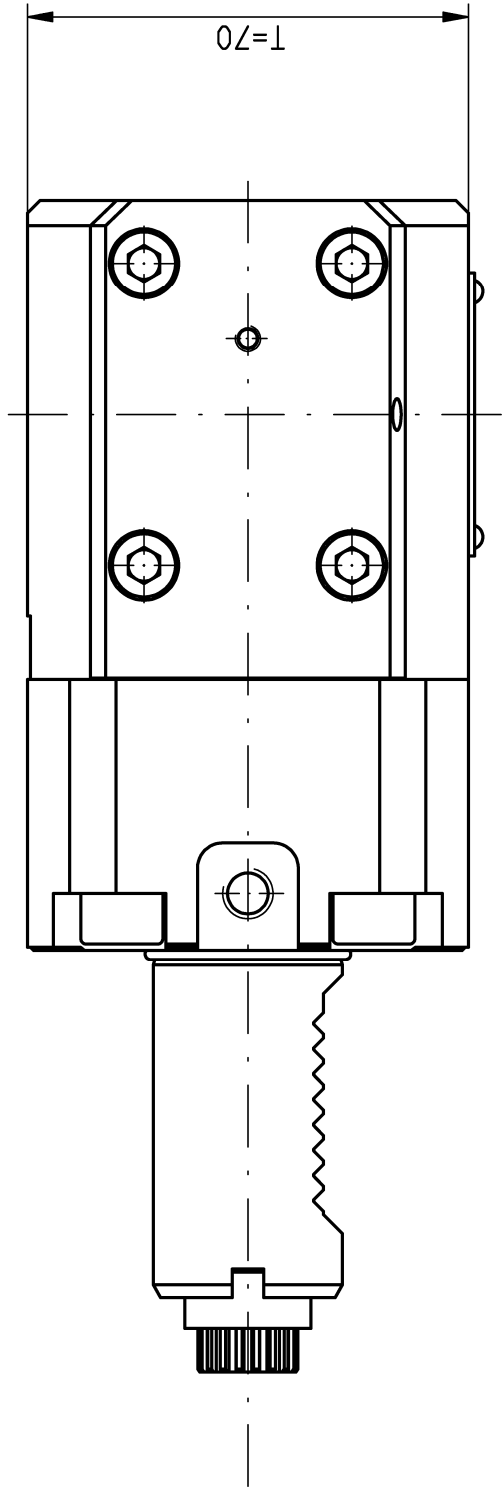

Only for information !
When one change, the drawing does not interchange
It is strictly prohibited to copy, reproduce or develop these drawings to third persons without having our written permission. A copyright violation involves a claim for damages and is indictable if it is premeditative done.
Fa. mimatic GmbH

A168444		ID-Nr.	Allg. Tol. ZWN-H		Maßstab	1:1
A168444			ISO 2768-m		Werkstoff:	
		manuelle Änderung		19.07.2016	Maßblatt	
				Datum	Name	
				Bearb. 25.08.2008	Werkler	
				Gepr. 19.07.2016	Schmaltz	
				F/M/Q		
05		Standard 2016	30.06.2016	Schneid	Dwg. C: 00126062. SZA	
04		Schnitt 168654 geü.	27.08.2013	Holz		
03		Schnitt-Verz. kor.	10.07.2013	Krupp	Zeichnungs-Nr.:	
02		Text korrigiert	10.07.2013	Krupp	00031317	
01		Gehäuse aktualisiert	12.12.2008	Wekt		
Zust.		Änderung	Datum	Name	Urspr. 00031266	
					Ers. d.: Ploiserver	

mimatic®
mimatic 87488 Betzigou – Westendstraße 3
GmbH Tel.: 0831/57444-0 Fax.: -90
AGW-SA-C-30-5480-ER25-I Blatt
L1=85 i=1:2 S=55 Links
Ers. f.:
Bt.