
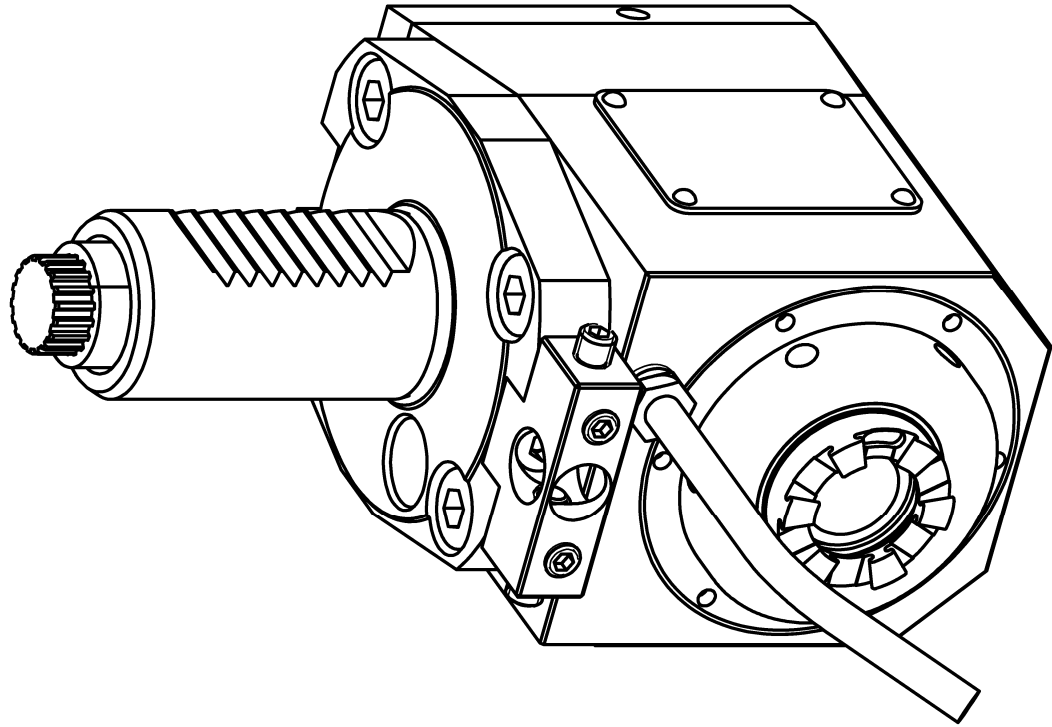
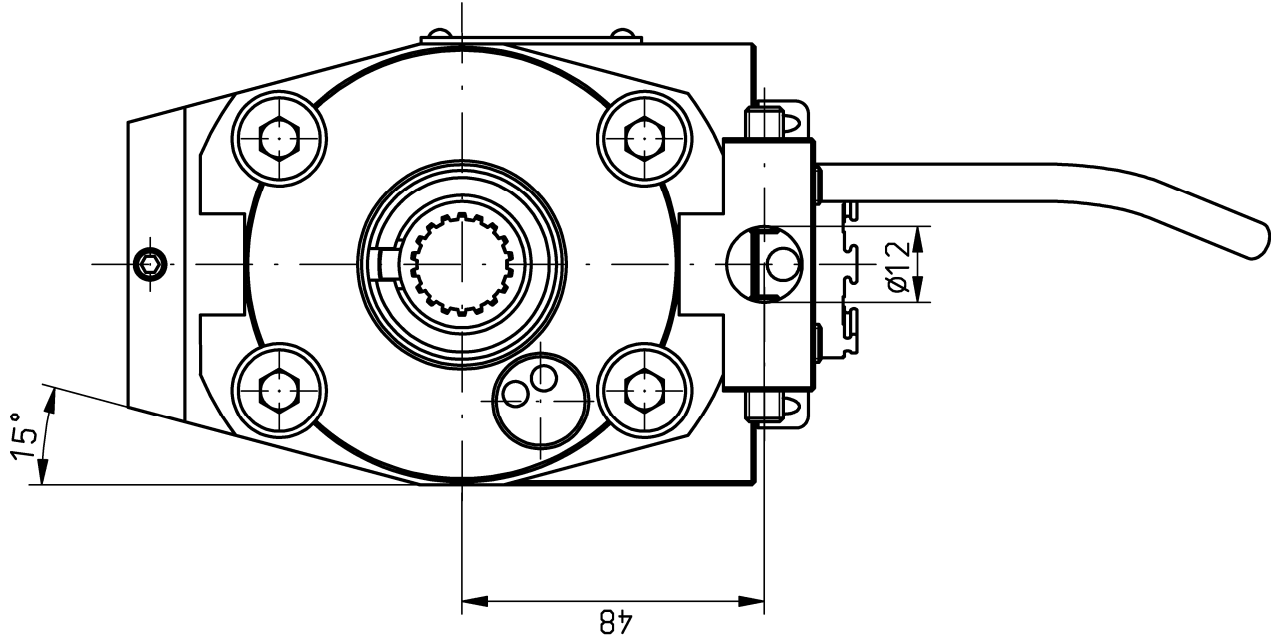


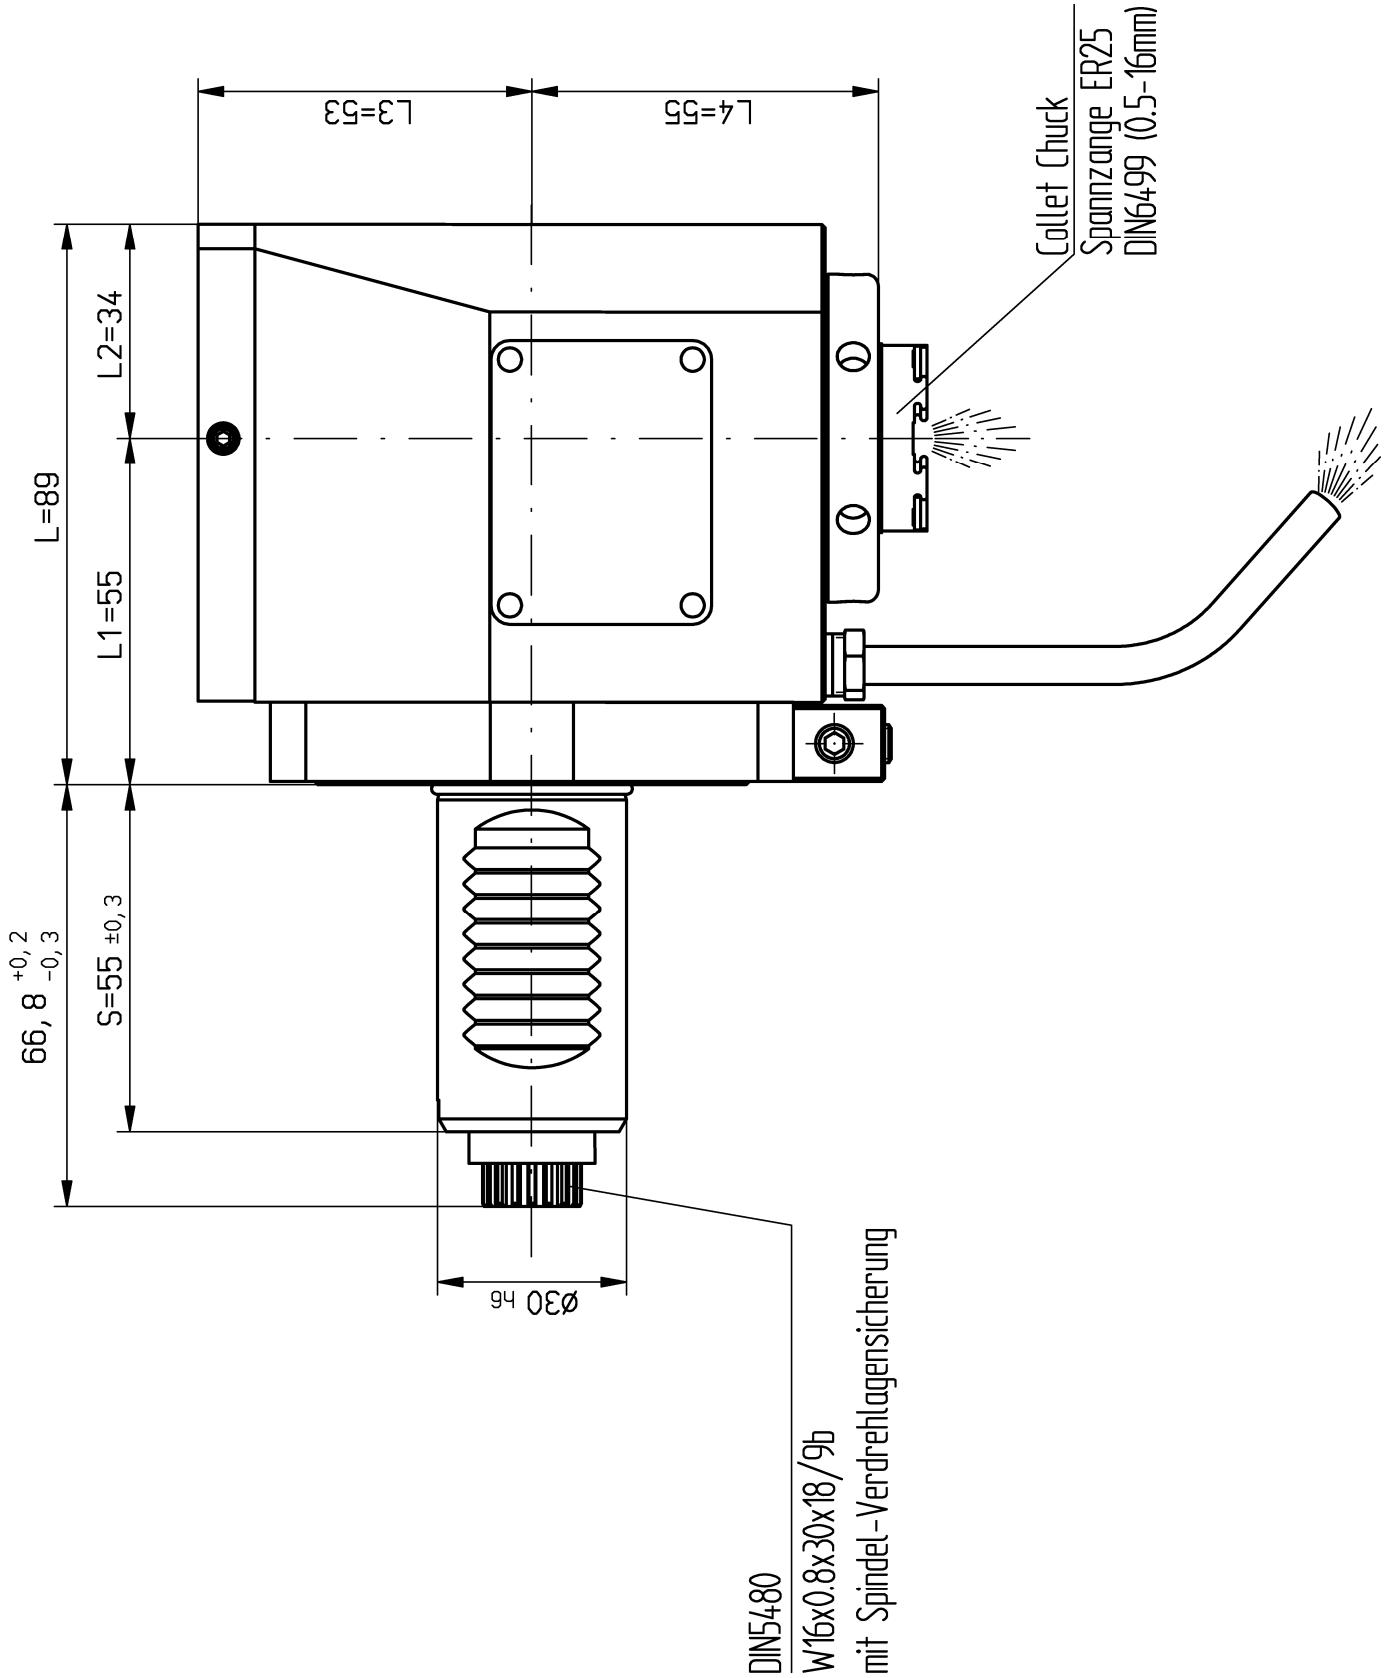

n1(max) = 6500 U/min
n2(max) = 6500 U/min
M (max) = 25 Nm
i(n1/n2) = 1 : 1
p(max) = 70bar

Drehrichtungsumkehr
direction of rotation reversal

Kühlmittelzufuhr i.K. durch die Spindel
und e.K. über Spritzrohr
internal coolant supply through the spindle
and external coolant supply through pipes

Gewicht ca. 4kg
weight around 4kg


Kopf 180° gedreht montierbar
Head 180° adjusted mountable

Only for information !

When one change, the drawing does not interchange

It is strictly prohibited to copy, reproduce or develop these drawings to third persons without having our written permission. A copyright violation involves a claim for damages and is indictable if it is premeditative done.

Fa. mimetic GmbH

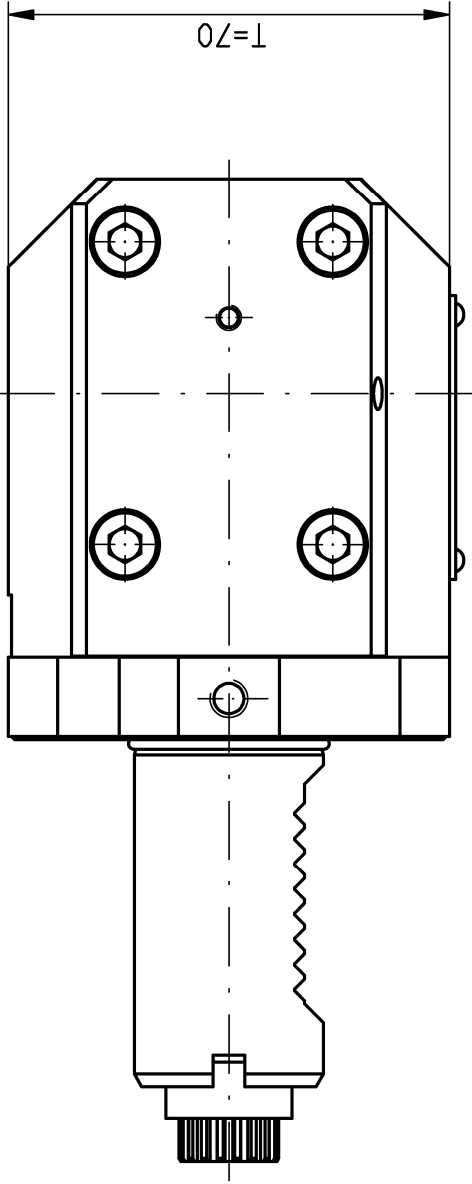

A103515		ID-Nr.	Allg. Tol.		Maßstab 1:1	
			ISO 2768-m		Werkstoff:	
		manuelle Änderung	19.07.2016		Maßblatt	
			Datum	Name	mimetic® 7 0 0 1 5 1 5 1 5 1 5 mimetic 87488 Betzigau – Westendstraße 3 GmbH Tel.: 0831/57444-0 Fax.: -90	
			Bearb. 29.06.2016	Schmähz		
			Gepr. 19.07.2016	Schmähz		
			F/M/Q			
			DW. C. 00126027.5ZA			
			Zeichnungs-Nr.:			
			00049897			
Zust.	Änderung	Datum	Name	Ers. f.: [Ers. d.] Plotserver		
				Bl		