


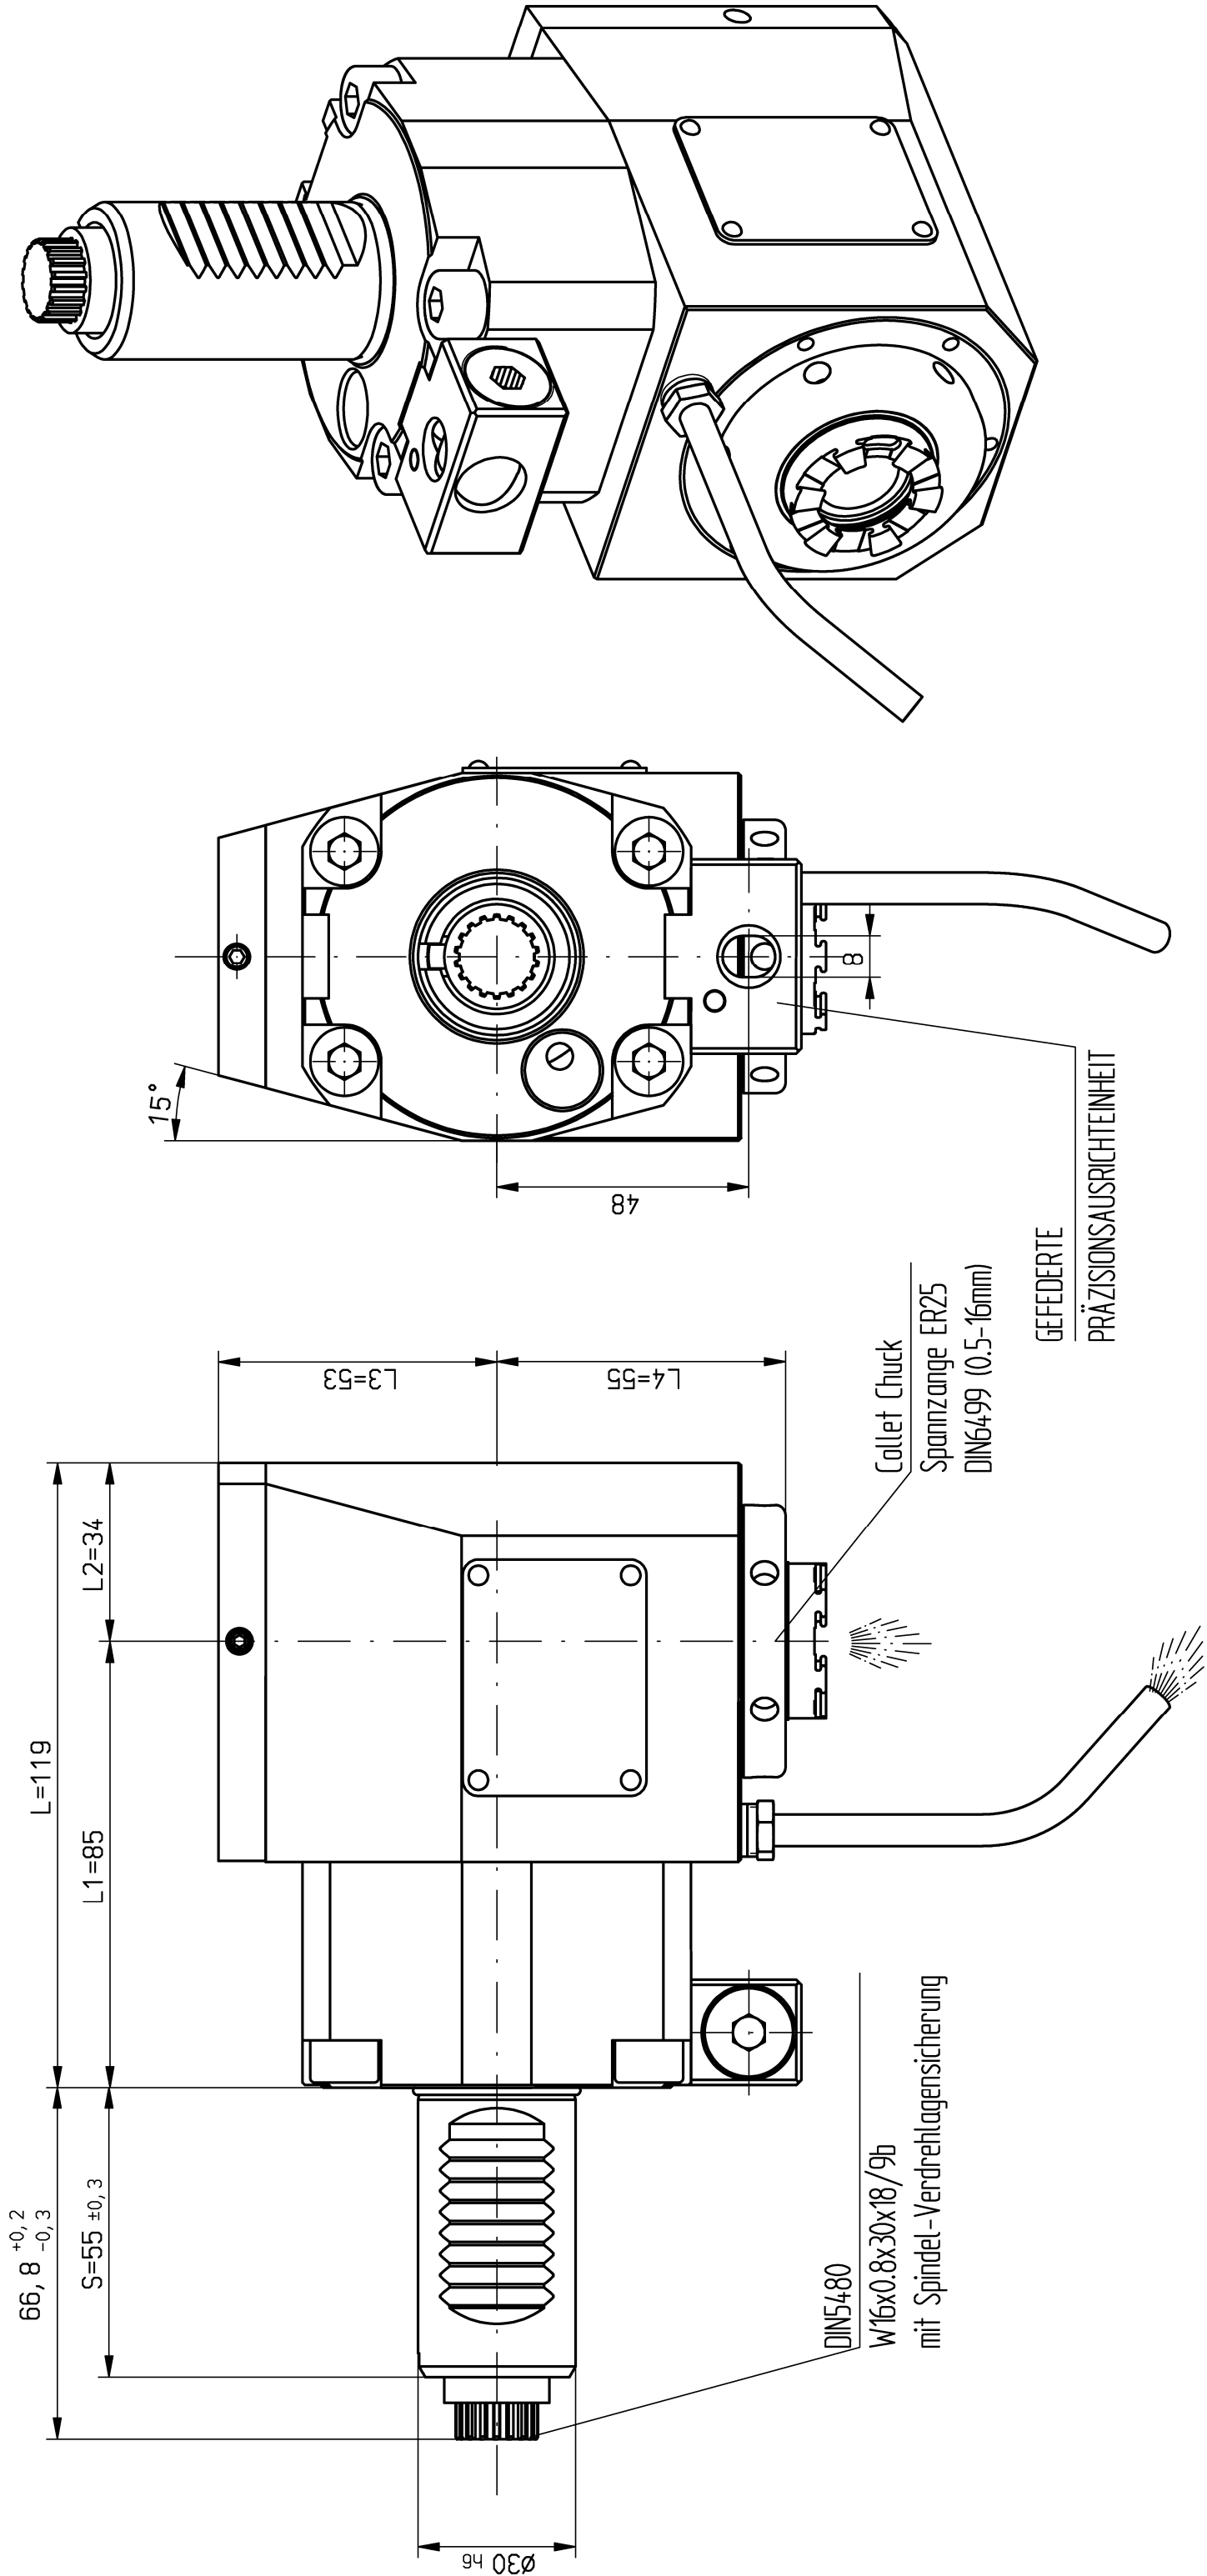


n1(max) = 6500 U/min
n2(max) = 6500 U/min
M (max) = 25 Nm
i (n1/n2) = 1 : 1
p(max) = 70bar

Drehrichtungsumkehr
direction of rotation reversal

Kühlmittelzufuhr i.K. durch die Spindel
und e.K. über Spritzrohr
internal coolant supply through the spindle
and external coolant supply through pipes

Gewicht ca. 5kg
weight around 5kg

Kopf 180° gedreht montierbar
head 180° adjusted mountable

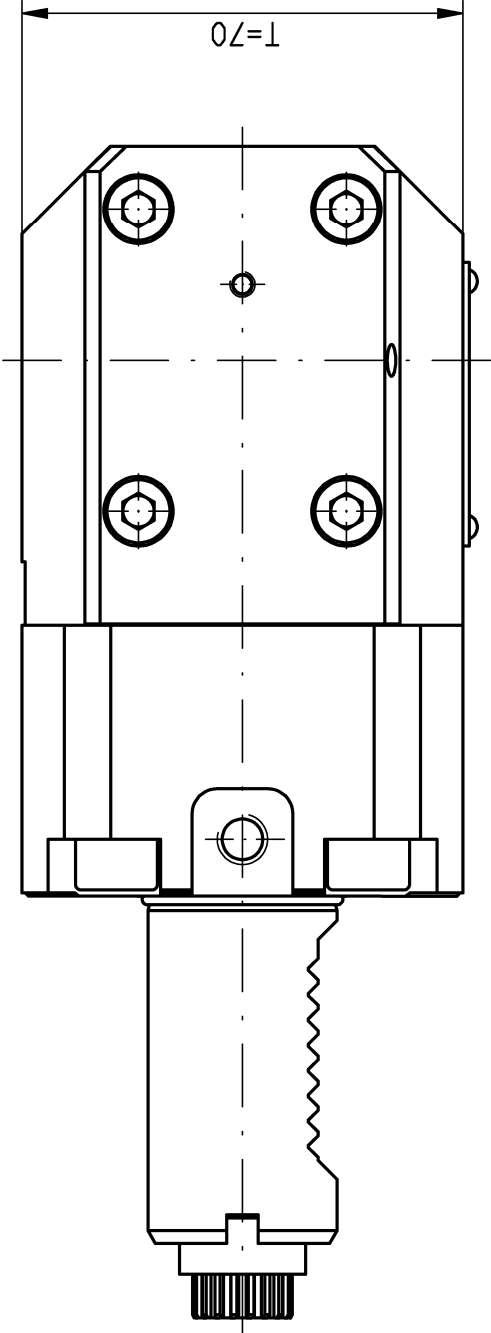

Only for information !
When one change, the drawing does not interchange
It is strictly prohibited to copy,
reproduce or develop these drawings
to third persons without having our
written permission. A copyright violation
involves a claim for damages and is
indictable if it is premeditative done.
Fa. mimatic GmbH

A133731		ID-Nr.	Allg. Tol. ZN-H		Maßstab	1:1	
A10000110		ISO 2768-m		Werkstoff:			Maßblatt
manuelle Änderung			19.07.2016	Name			
				Datum			
				Bearb. 31.08.2007			
				Gepr. 19.07.2016			Schmaltz
				F/N/Q			
				dw. C. 00126041.5ZA			
				Zeichnungs-Nr.:			
				00027410			
03	Standard 2016	30.06.2016	Schm	AGW-SA-C-30-5480-ER25-I			
02	Umbau auf neue Bauteile	16.06.2015	Schm				
01	Anf.-Nr. war 1000011	25.11.2011	Heizh				
Zust.	Änderung	Datum	Name	Urspr. 00027397			

mimatic®		mimatic 87488 Betzigau – Westendstraße 3	
T O O I S Y S T E M S		GmbH Tel.: 0831/57444-0 Fax.: -90	
		Blatt	
		L1=85 i=1:1 S=55 Links	
Ers. f.:		Ers. d.: Plotsver	