
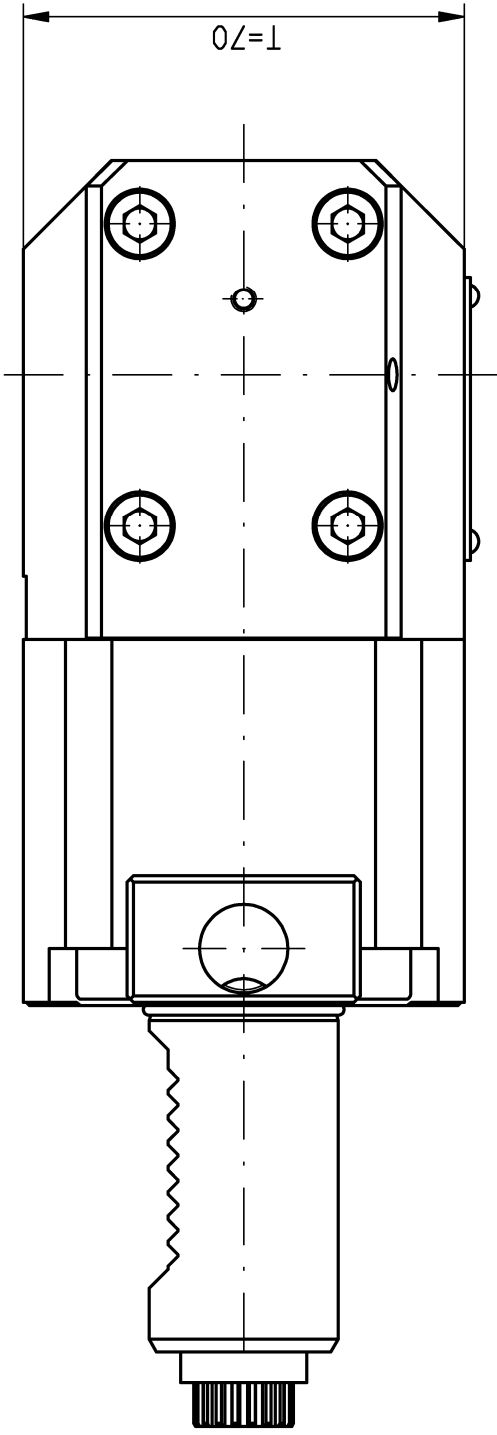


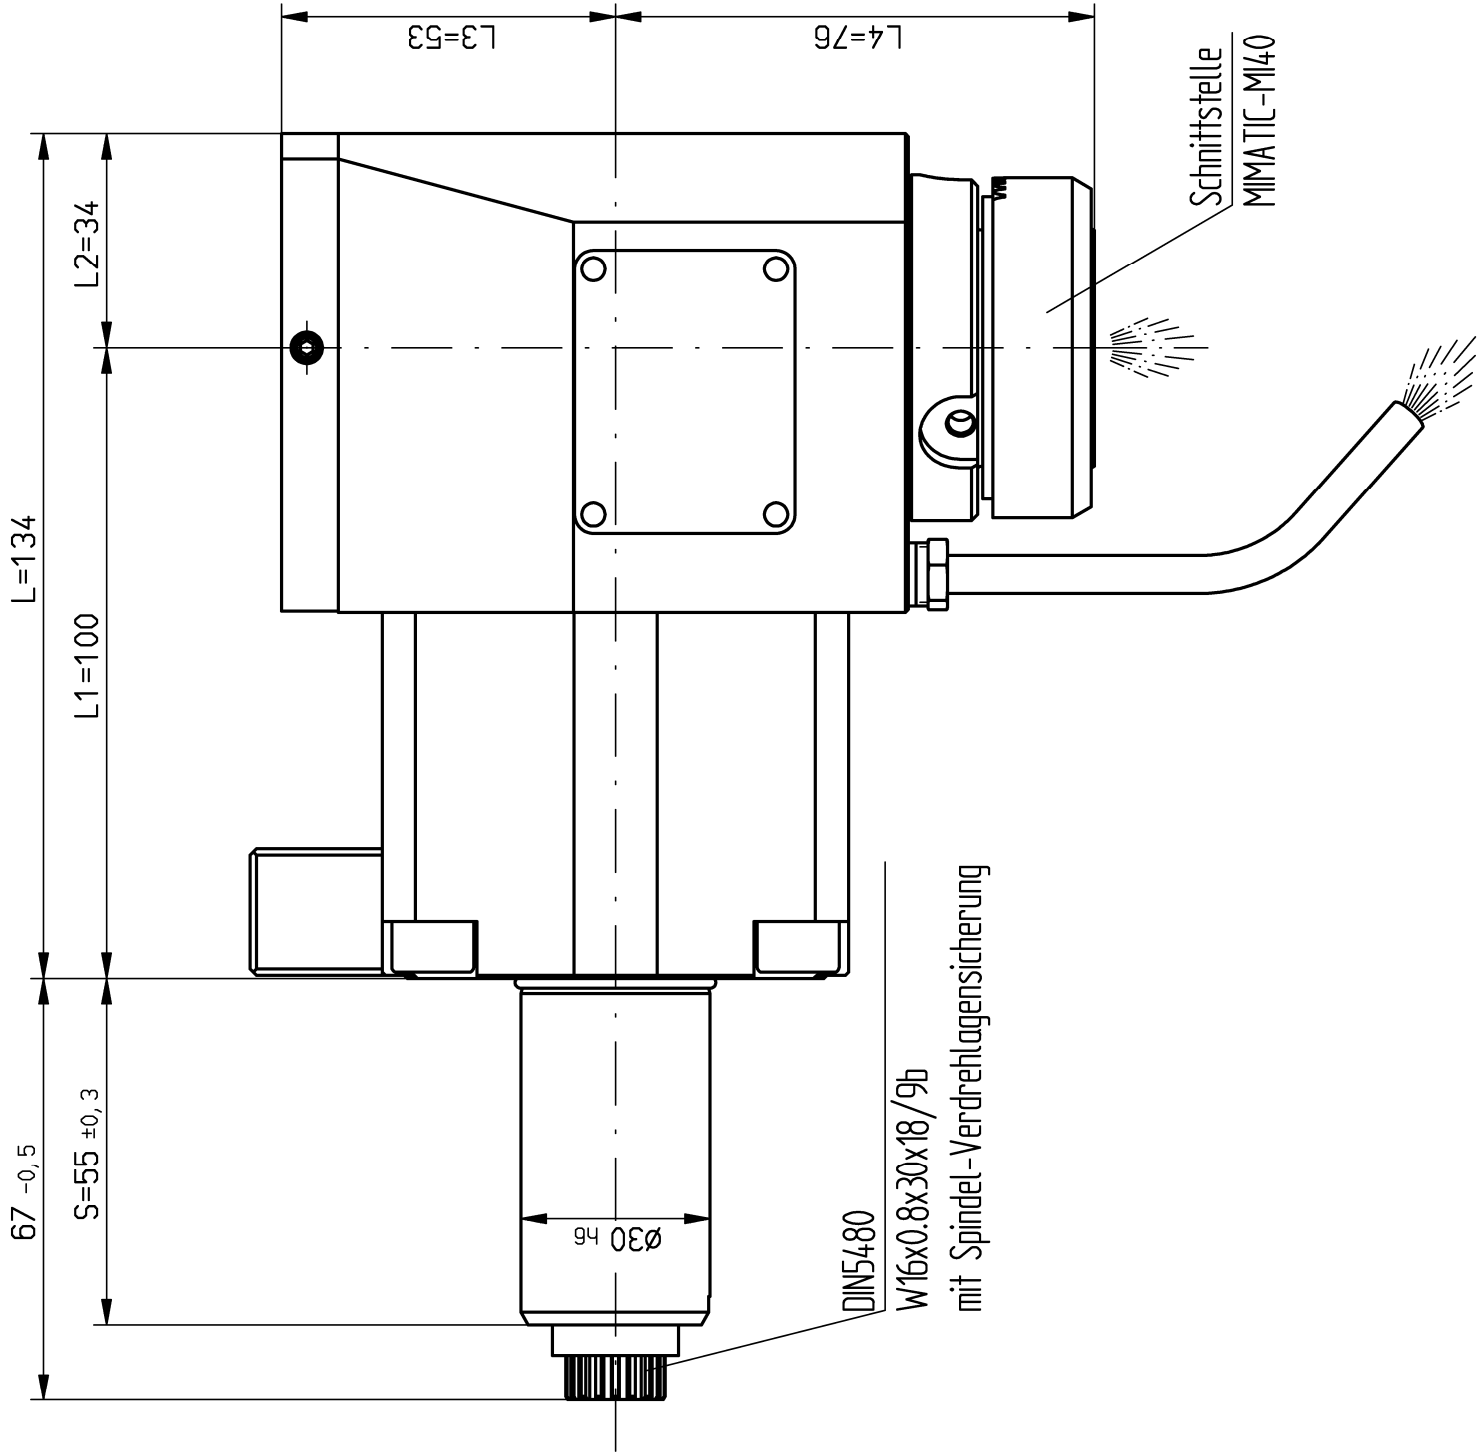


Only for information !

When one change, the drawing does not interchange

It is strictly prohibited to copy, reproduce or develop these drawings to third persons without having our written permission. A copyright violation involves a claim for damages and is indictable if it is premeditative done.

Fa. mimetic GmbH

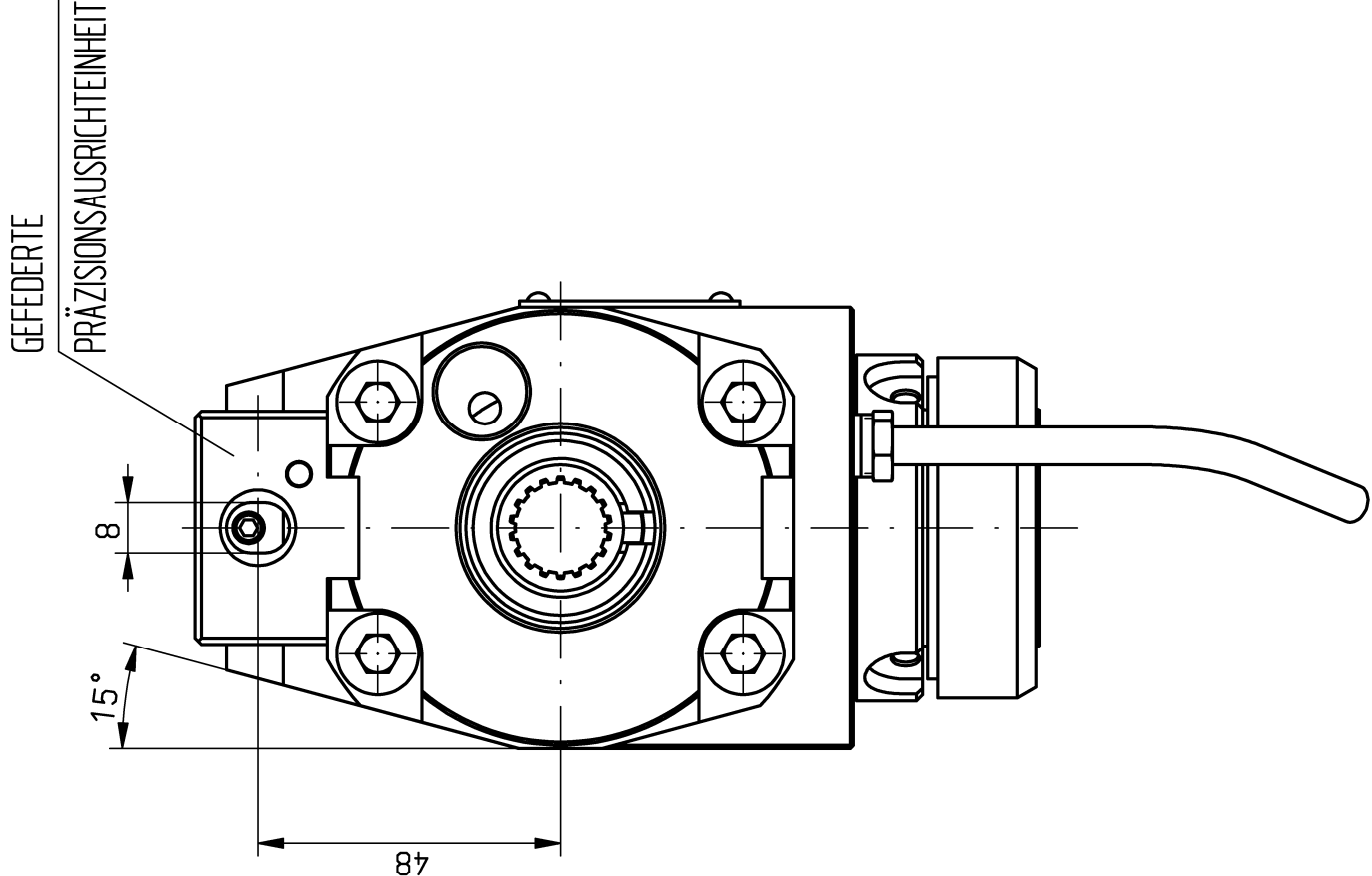


$n1(max) = 6500 \text{ U/min}$
 $n2(max) = 6500 \text{ U/min}$
 $M(max) = 25 \text{ Nm}$
 $i(n1/n2) = 1 : 1$
 $p(max) = 70bar$

Drehrichtungsumkehr
direction of rotation reversal

Kühlmittelzufuhr i.K. durch die Spindel
und e.K. über Spritzrohr
internal coolant supply through the spindle
and external coolant supply through pipes

Gewicht ca. 5,5kg
weight around 5,5kg

Kopf 180° gedreht montierbar
head 180° adjusted mountable

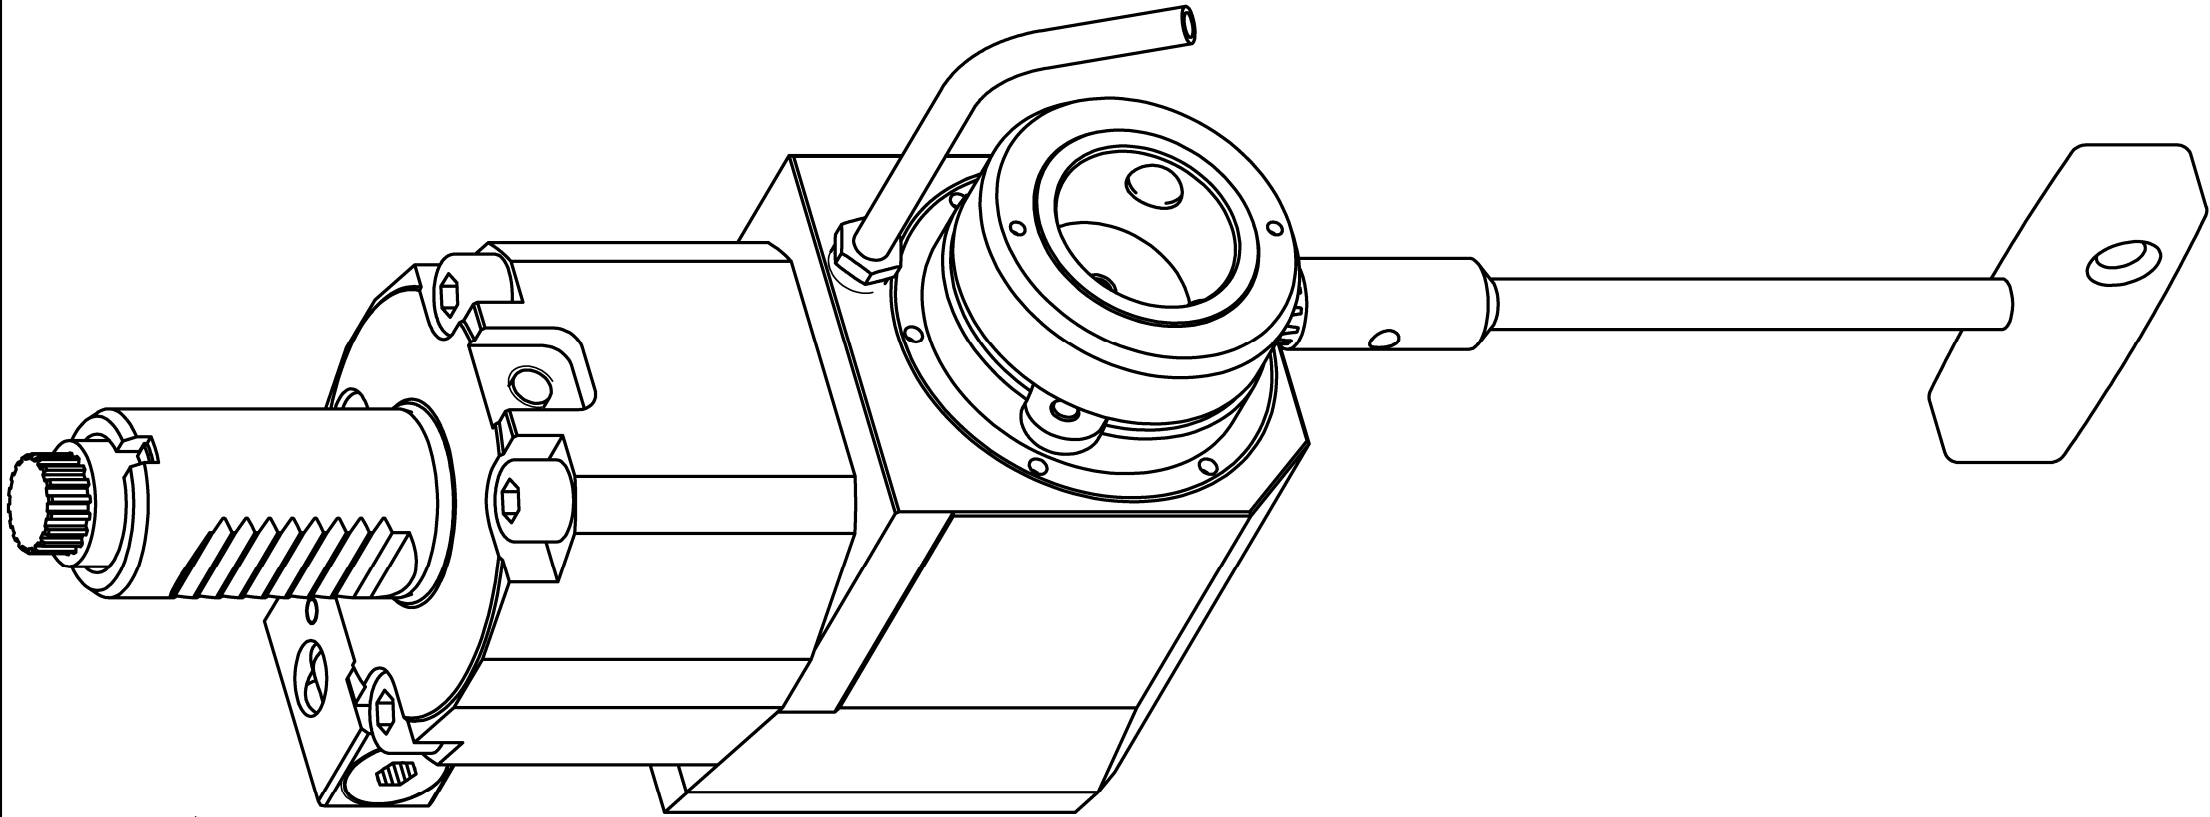

A133764	ID-Nr.	Allg. Tol.	ZWN-H	Maßstab 1:1	
				Werkstoff:	
				Maßblatt	
A10000120	manuelle Änderung	ISO 2768-m 19.07.2016	Name	mimatic® mimatic 87488 Betzigou – Westendstraße 3 GmbH Tel.: 0831/57444-0 Fax: i.-90 Tel.: 0831/57444-0	Blatt
04	Standard 2016	29.06.2016	SchmId	dw. C. 00126006. SZA	AGW-SA-C-30-5480-MI40-I
03	Drehrohr/-moment get.	14.04.2015	Holzh	Zeichnungs-Nr.: 00036462	Blatt
02	auf reise Bauart get.	30.12.2010	Holzh	00036462	Blatt
01	Umbau auf MI-Einhand	08.03.2010	Holzh	00036462	Blatt
Zust.	Änderung	Datum	Name	Urspr. 00014614	Ers. d.: Plaiserver