

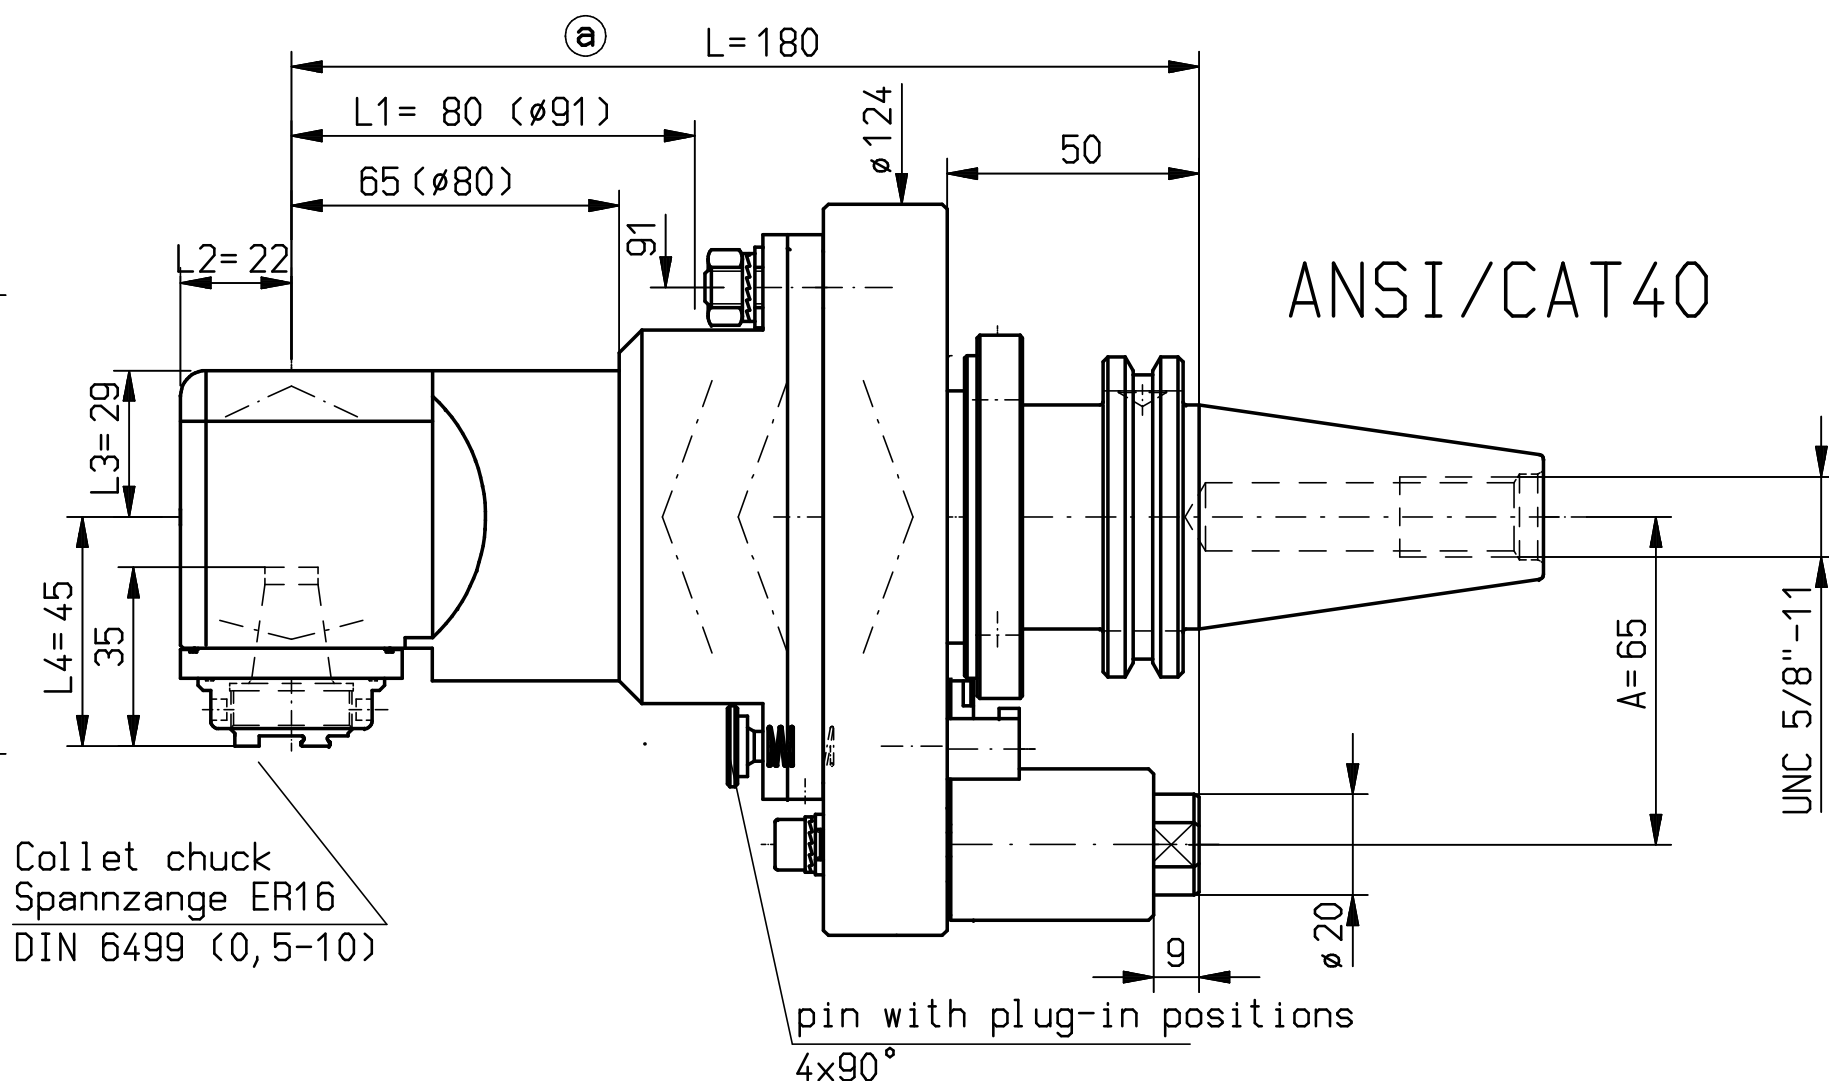


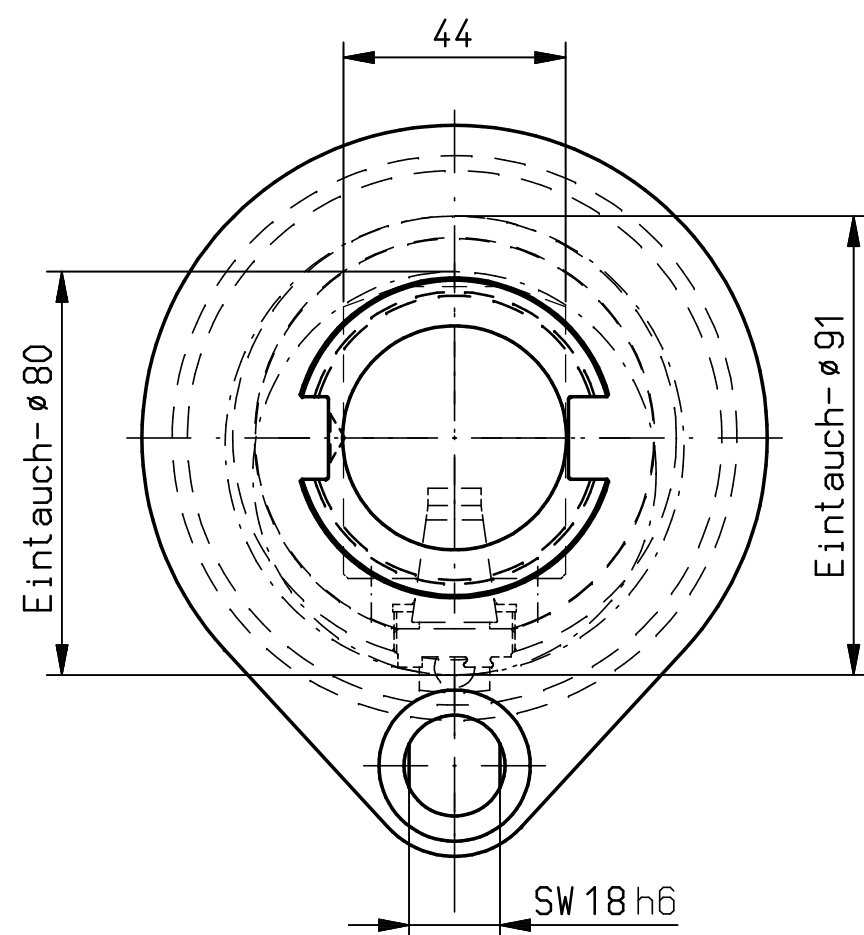

Collet chuck
Spannzange ER16
DIN 6499 (0,5-10)

pin with plug-in positions
4x90°

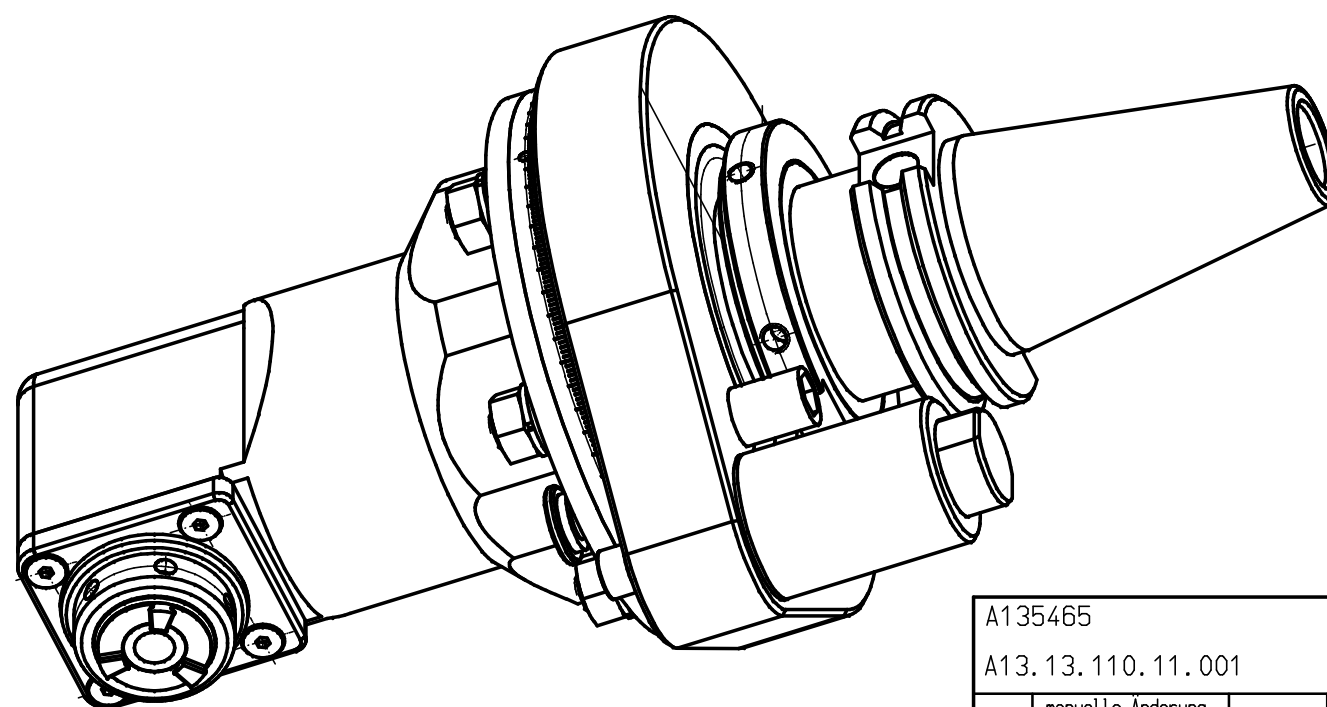

02

n1(max) = 10.000 U/min
n2(max) = 10.000 U/min
M (max) = 12 Nm
i(n1/n2) = 1 : 1

Kopf 360° drehbar
head 360° adjustable
Drehrichtungsumkehr
direction of rotation reversal

Gewicht ca. 6kg
weight around 6kg

kein Kühlmittel
no coolant

A135465				Allg. Tol.		ZWN-M		Maßstab 1:1,5		50109142	
A13.13.110.11.001				ISO 2768-m				Werkstoff:			
				02.12.2009				Maßblatt			
manuelle Änderung						Datum		Name		mimatic® Tool Systems ZETTL 87488 Betzigau – Westendstraße 3 GmbH Tel.: 0831/57444-0 Fax.: -90 SW CAT40 ER16 12Nm OK	
a	um 30mm verl.	24.1.06	Ho			Bearb. 23.01.2006		Holzheu			
						Gepr. 29.10.2009		Holzheu			
						Norm					
						CAD: C: 00063630.SZA					
								Zeichnungs-Nr.:		Blatt	
								00021840			
02	C40RAM-ER16-180	29.10.2009	Holzheu					Urspr. 00021840(L150)		Ers. f.:	
01	Fasen in Radien geän	17.01.2007	Ho							Ers. d.: Plotserver	
Zust.	Änderung	Datum	Name								